




EQUIPMENT & TOOLS FOR FALL PROTECTION

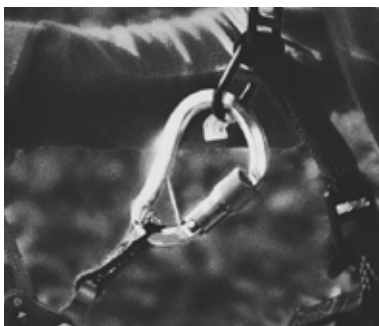

BUCKINGHAM **BUCK** 1896

BUCKINGHAM MFG has proudly served industries with workers who climb wood poles, trees, towers and structures that support electricity, cable and telecommunications equipment for over 120 years. Whether for work above or below ground in these industries, we produce personal protection equipment and specialty tools for work positioning, retrieval, fall restraint, fall arrest and suspension work applications. Most people do not think about the importance of work performed by those in this industry every day until the power goes out, the tv and computer stop working or a tree falls on a house or power line. Our customers maintain and restore services in all types of weather. This catalog is a tribute to these highly trained workers performing dangerous jobs with little recognition.

Buckingham MFG
1-11 Travis Avenue
Binghamton, NY 13904-1690, USA

+1 800 937 2825

BuckinghamMFG.com

Sales@buckinghammfg.com

facebook.com/buckinghammfg
instagram.com/buckingham_mfg
twitter.com/buckingham_mfg
youtube.com/buckmfg
google.com/+buckinghammfg



CONTENTS

*This mini catalog is a sampling of the thousands of products we manufacture.
For our full line, please visit BuckinghamMFG.com*

- 04** NEW PRODUCTS
- 05** HARNESES
- 11** ENERGY ABSORBING LANYARDS /
PFLs / SRLs
- 15** AFTER FALL SELF RESCUE
- 16** PORTABLE LADDER FALL PROTECTION
- 18** TOOL FALL PROTECTION /
TOOL TETHERS

Buckingham's special niche is to develop products to fit our customers' exact needs. Our real specialty is listening to the exact wants and needs of those industries we support, helping them find a solution to their problem, and then building a high-quality and reliable product with ZERO defects. If you have an interest in customizing any product you see in this catalog or building something to meet your exact specifications, please call 1-800-YES-BUCK and we can take you through that process. Customization is something we thrive on and is the exact reason why we are the world's leading manufacturer of fall protection equipment.



Made in the USA



WARNING: Cancer and Reproductive Harm For All Products on Page – www.P65Warnings.ca.gov

01 NEW PRODUCTS



FEATHERWEIGHT HARNESSSES

Nothing can make a workday worse than a heavy harness and chafing, especially in or around the neck area. While many harness shoulder pads on the market seem to increase irritability and chafing while working overhead, the Buck Featherweight Harnesses with Anti Chaffe Technology achieves the opposite. Buckingham's ACT (Anti Chafe Technology) Collar™ features folded, stitched, and leather lined shoulder straps to reduce neck chafing while working overhead, creating a much more comfortable day on the job. With these harnesses, through advanced design and materials, we've built our lightest harnesses ever.



Featherweight Harness w/ Dielectric Buckles 68L98Q1

- Lightweight – just 3.1 lbs.
- 9KV Dielectric Quick Connect chest and leg strap buckles.
- Torso adjustment features no cumbersome web tails.



OUR LIGHTEST HARNESS EVER MADE!

Featherweight Harness 6398JQ1

- Lightweight – just 2.8 lbs.
- Hook and loop chest strap and aluminum quick connect leg strap buckles for quicker and easier donning.
- Torso adjustment features no cumbersome web tails.



Buckohm™ Blackout Truefit™ X-Style Harness With Pigtail U602P8Q1

An X-style TrueFit™ harness equipped entirely with dielectric hardware for working conditions with electrical hazards. The dielectric hardware eliminates the potential of static electricity being transferred through steel hardware if working around an energized conductor in wet or damp conditions. Also, Dielectric hardware has a better resistance to corrosion in extreme conditions (hot/humid or salty air environments).

Features Include:

- Unique adjustment features on the front and back of the harness for universal sizing.
- Dielectric quick connect chest & leg strap buckles for easy donning.
- Dorsal pigtail w/Dielectric D-Ring. Pigtail allows for easy connection/disconnection from your lanyard. Lightweight back, shoulder & legs pads.
- Sternal web loop.
- Energy absorbing lanyard breakaway attachment & leg strap retainers.
- Permanently attached BuckStep™ 2.0.

Meets or exceeds ASTM F887 Electric Arc Performance Requirements, ANSI Z359. This harness has been arc flash tested and meets or exceeds ASTM F887 Electric Arc Performance Requirements.



02 HARNESSES



Buckingham's special niche is to develop products to fit our customers' exact needs. It's something we thrive on and is the exact reason why we are the world's leading manufacturer of fall protection equipment. We're unlike other manufacturers that offer one-size-fits-all solutions where the end users are out of luck if the product doesn't meet their exact needs. Our real specialty is listening to our customer's exact wants and needs, helping them find a solution to their problem, and then building a high-quality and reliable product with ZERO defects. All harnesses shown meet the strict requirements of ANSI Z359.11 as well as the Arc Flash Requirements of ASTM F887.

'H' Style



U6398CQ24
(See Pg. 10)

'X' Style



603SA8Q4
(See Pg. 7)

'Y' Style



69B9DQ6
(See Pg. 14)

The following pages feature a wide array of full body harnesses to be used in fall arrest, work positioning, suspension, retrieval, and rappelling applications. If you have an interest in potentially building to your company's specs, please contact the Buckingham Manufacturing Customer Service team at 1-800-YES-BUCK or Sales@BuckinghamMFG.com.

All harnesses on the following pages are accompanied by a symbol that indicates whether it meets the ASTM F887 Arc Flash Requirements, has a sternal attachment point and whether it is intended for fall restraint, fall arrest, retrieval or work positioning.



FALL
RESTRAINT



FALL
ARREST



WORK
POSITIONING



RETRIEVAL
SYSTEM



STERNAL
ATTACHMENT



MEETS ASTM F887
REQUIREMENTS



Made in the USA



WARNING: Cancer and Reproductive Harm For All Products on Page – www.P65Warnings.ca.gov

'H' STYLE HARNESSSES



**BuckOhm™
'H' Style Harness
68L9EQ12**



**BuckOhm™ Blackout
'H' Style Harness
68L9EQ21**



Features Include:

- 9KV rated Dielectric hardware.
- Lightweight
- Dielectric quick connect chest buckle
- Dielectric dorsal D-Ring
- Dual trauma straps
- Arc tested shoulder pads
- Dielectric quick connect leg strap buckles for easy donning
- Dielectric friction buckles on vertical shoulder straps for height adjustments



Available in S, M, L and XL sizes. Meets ASTM F887 Arc Flash Requirements & ANSI Z359.



Seat version
also available.
Order model:
68K966K6

**BuckTech™ Mobility Harness
68K965K6**

Features Include:


- Chest strap adjustment buckles allows user to properly position sternal D-Ring & prevent it from sliding up during a fall.
- Quick connect chest and leg strap buckles.
- Breakaway loops at waist for storage of lanyard hooks & rear gear loops for tools.
- Aluminum D-Ring dorsal attachment & work positioning D-Rings.
- Friction buckles for height adjustment.
- Great for work positioning on ladders/steel & suspension work. Frontal attachment makes it ideal for use w/the BLT.



**Basic 'H' Style Full Body Harness
6381700J12**

Features Include:

- Web loop dorsal attachment.
- Hook and loop chest strap.
- Step in straps and no height or leg strap adjustment.
- Made from nylon webbing.



**Hi-Viz 'H' Style Full Body Harness
68C7GQ52**

Features Include:

- Full body bucket truck harness designed for fall protection while working out of a bucket.
- Quick connect buckles for easier donning.
- Steel D-Ring dorsal attachment.
- Reflective material stitched to the front and back.
- Two positioning D-Rings and two web loops located at the hip for retrieval purposes.



**'H' Style Full Body Harness
U637G8C700J5**

Features Include:

- Web loop dorsal attachment.
- Hook & Loop chest strap.
- Quick connect leg straps.
- Friction buckles for height adjustments.
- Lanyard parking attachment.





**'H' Style Full Body Harness
6493700J12**

Features Include:

- Web loop dorsal attachment.
- Interlocking chest buckle.
- Interlocking leg strap buckles without chafes.
- Friction buckles for height adjustments.



**Mini BuckFit™ 'H' Style Full Body Harness
6398C700K4**

Features Include:

- Foam padded shoulder pads.
- Web loop dorsal attachment.
- Hook & Loop chest strap.
- Quick connect leg straps.
- Friction buckles for height adjustments.
- Lanyard parking attachment.



**Mini BuckFit™ 'H' Style Full Body Harness
6398CQ24**

Features Include:

- Web loop dorsal attachment.
- Hook & loop chest strap.
- Foam padded shoulder and leg pads.
- Quick connect buckles w/leather chafes on leg straps.



**Mini BuckFit™ 'H' Style Full Body Harness
68D98C700K3**

Features Include:

- Hook & loop chest strap.
- Web loop dorsal attachment.
- Quick connect buckles with leather chafes on chest & leg straps.
- Friction buckle mounted on vertical shoulder strap for height adjustments.



**Harness-Lanyard Combo
U64937Q6**

Features Include:

- Includes 4 1/2' BuckYard™ Lanyard.
- Universal size (Fits Medium - X-Large).
- Interlocking chest & leg buckles to ensure comfort.
- For a 6' BuckYard™, use model **U64937Q8**.



Made in the USA



WARNING: Cancer and Reproductive Harm For All Products on Page – www.P65Warnings.ca.gov



**The BLT Harness
U601A3Q1**

Features Include:

- Universal size.
- Nylon web loop dorsal attachment.
- Sternal D-Ring for connection to the BuckArrester™.
- D-Rings on the hips so you can tie off to a ladder with a positioning strap/rope but are small enough so the harness can be used in a bucket truck as well.
- Goes great with the Buck Ladder Tether (See page 24).



**'X' Style Full Body Harness
603E3700J12**

Features Include:

- Constructed of strong nylon webbing.
- Web loop at sternum.
- Web loop dorsal attachment.
- Interlocking torso and leg strap buckles.
- Adjustable torso buckles for proper fit.



**'X' Style Full Body Harness
603Z8Q1**

Features Include:

- Quick connect buckles at legs and torso.
- Web loop sternal and dorsal attachments.
- Height adjustments at torso.
- Fully padded shoulder pads.
- Lanyard parking attachment.



**BuckFit™ 'X' Style Full Body Harness
603S8C500CK1**

Features Include:

- 18" Pigtail dorsal attachment with small D-Ring.
- Kevlar mesh shell.
- Web loop sternal attachment.
- Foam padded shoulder and leg pads.
- Quick connect buckles w/leather chafes on leg straps & torso.
- Lanyard parking attachment.





**Mini BuckFit™ 'X' Style Full Body Harness
603P8C500CK3**

Features Include:

- 18" dorsal pigtail with small D-Ring.
- Sternal web loop attachment point.
- Quick connect buckles with leather chafes.
- Foam padded shoulder and leg pads for added overall comfort.



**BuckFit™ 'X' Style
Full Body Harness
603S8C700K1**

Features Include:

- Web loop dorsal attachment.
- Dri-lex shell
- Front web loop for rescue or use with a rope or cable grab.
- Padded Dri-lex shoulder and leg pads to wick moisture away.
- Quick connect buckles with leather chafes on leg straps and torso.



**Mini BuckFit™ 'X' Style
Full Body Harness
603S8C700K3**

Features Include:

- Sternal & dorsal web loop attachment.
- Quick connect buckles with leather chafes at legs & torso.
- Foam padded shoulder and leg pads for added overall comfort.
- Lanyard parking attachment.



**BuckOhm™ Articulator
69B9DQ6**

Features Include:

- Dielectric D-ring at the sternum (better for rescue).
- Dielectric shoulder strap adjuster.
- Dielectric quick connect leg strap buckles for easy donning.
- Dielectric friction buckles on vertical shoulder straps for height adjustments.
- 5,000 lb. rated nylon dorsal loop attachment that can be used for fall arrest or rescue.
- Dielectric components on this product are rated to at least 3KV.
- Arc tested shoulder pads.
- Color coded leg straps makes donning easy.
- Articulates in three places making it ideal for anywhere that requires the user to bend, reach, twist, and climb at heights.
- Can be used by itself or the user can easily attach a lineman's body belt.



Made in the USA



WARNING: Cancer and Reproductive Harm For All Products on Page – www.P65Warnings.ca.gov



**The BuckOhm™ BuckTrievers™
603A8Q12**

Features Include:

- 9KV dielectric hardware.
- Lightweight, comfortable, breathable and most importantly, functional back pad.
- Web Loop at Sternum.
- Quick Connect buckles for easy donning.
- 3 reflective retrieval loops.
- 2 reflective loops at hips.
- Padded shoulder straps.



**The Economy 'X' Style BuckTrievers™
603S8Q211**

Features Include:

- Web loop at sternum.
- Web loop dorsal attachment.
- Quick Connect legs straps for easy donning.
- 3 reflective retrieval loops and 2 reflective loops at hips.
- Padded leg and shoulder straps.
- Use in conjunction with Buck's Manhole rescue lifeline kits and Confined space retrieval systems.



**BuckOhm™ 'H' Style Confined Space Harness
68M9EQ2**

Features Include:

- 9KV dielectric hardware. *Chest D-Ring rated at 3KV.
- Lightweight, comfortable, breathable and most importantly, functional back pad.
- Web loops at the dorsal location.
- Quick Connect legs straps for easy donning.
- 5 Reflective web loops.
- Back/shoulder pad provides comfort and ease when donning.
- Harness comes w/an energy-absorbing lanyard breakaway attachment (ensure ANSI compliance if removing back pad) & leg strap retainers to use if needed.



**BuckStep™ 2.0
105RSDK1**


Features Include:

- Two-part design allows for a more compact design and provides easier length adjustments compared to the one-part BuckStep™ system.
- New adjustment buckles located at harness for easier length adjustments and added strength.
- Girth hitches to the harness for easy attachment.
- The ring and connector design aids in connection of the two trauma straps.
- Small/compact pouches, just 4 1/2" x 2" in size.
- Lightweight - 3.4 oz. (each), 6.8 oz. (pair).



**BuckStep™ System
105RS**


Alleviates effects of orthostatic intolerance (suspension trauma). Allows victim to immediately deploy a body support system that allows for improved blood circulation and ability to move and flex muscles until rescue. Attaches to any brand full body harness and is fully adjustable for any sized user. Compact and easy to mount. Order model **105RSK1** for an arc tested system that meets ASTM F887.



- 1.**
Remove carabiner strap from pouch



- 2.**
Attach carabiner to opposite side of harness



- 3.**
Step into sling with both feet

Permanently attached BuckSteps™ available on almost all harnesses. Contact customer service at 1-800-YES-BUCK or sales@buckinghammfg.com.



03 ENERGY ABSORBING LANYARDS / PFLs / SRLs



PeerCheck™ PEERCHECK

- Buckingham PeerCheck™ is a simple, inexpensive and portable alarm system that notifies the worker and crew if a lanyard connection to the bucket truck anchor point has been inadvertently forgotten.
- PeerCheck™ is the equivalent to your seat belt alarm in your car.
- While there are other options currently available, PeerCheck™ is inexpensive, simple to use, and portable.



Scan the QR code to watch a video of the PeerCheck™ in action!

BUCKVIZ™ BUCKYARD™ W/LOCKING SNAP & WEB LOOP

Ideal for users w/web dorsal loops on harness & who want a light/compact shock absorber.

6' models only - For users up to 420 lbs., add suffix X4. For Factor II Fall (up to 12' free fall) add suffix X12.



BuckYard™

6' : 84V1D16S1
4.5' : 84V1D14.5S1
4' : 84V1D14S1

Also available w/black webbing
6' : 84V1E16S1
4.5' : 84V1E14.5S1
4' : 84V1E14S1

BUCKVIZ™ BUCKYARD™ W/2 LOCKING SNAPS

Ideal for users w/steel dorsal D-Ring on harness & who want a light/compact shock absorber.

6' models only - For users up to 420 lbs., add suffix X4. For Factor II Fall (up to 12' free fall) add suffix X12.



BuckYard™

6' : 8VV1D16S1
4.5' : 8VV1D14.5S1
4' : 8VV1D14S1

Also available w/black webbing
6' : 8VV1E16S1
4.5' : 8VV1E14.5S1
4' : 8VV1E14S1



Made in the USA



WARNING: Cancer and Reproductive Harm For All Products on Page – www.P65Warnings.ca.gov

BUCKVIZ™ BUCKYARD™ STRETCH W/LOCKING SNAP & WEB LOOP

Ideal for those who want smaller equipment (elastic bungee shrinks to approx. 44"). Great for users w/web dorsal loops.

6' models only - For users up to 420 lbs., add suffix X4. For Factor II Fall (up to 12' free fall) add suffix X12.

Same benefits of the Buckyard™ but with the addition of an elastic bungee (this reduces the size of a 6' lanyard to about 44" greatly reducing the chance of tripping over it). For full body harness w/web loop dorsal attachment. 1706 locking snap hook on one end and web loop on the other end. *Meets applicable OSHA, ASTM and ANSI Requirements*



**BuckYard™
Stretch**

**6' : 84V7D16S1
4.5' : 84V7D14.5S1
4' : 84V7D14S1**

Also available
w/black webbing
**6' : 84V7E16S1
4.5' : 84V7E14.5S1
4' : 84V7E14S1**



BUCKVIZ™ BUCKYARD™ STRETCH W/LOCKING SNAPS

Ideal for those who want smaller equipment (elastic bungee shrinks to approx. 44"). Great for users w/steel dorsal D-Rings.

6' models only - For users up to 420 lbs., add suffix X4. For Factor II Fall (up to 12' free fall) add suffix X12.

Same benefits of the Buckyard™ but with the addition of an elastic bungee. This reduces the size of a 6' lanyard to about 44" greatly reducing the chance of tripping over it. Use with a full body harness w/steel D-Ring dorsal attachment. 1706 locking snap hook on both ends. *Meets applicable OSHA, ASTM and ANSI Requirements*



**BuckYard™
Stretch**

**6' : 8VV7D16S1
4.5' : 8VV7D14.5S1
4' : 8VV7D14S1**

BUCKSTOP™

Ideal for users with steel dorsal D-Rings.

For users up to 420 lbs., add suffix X4. For Factor II Fall (up to 12' free fall) add suffix X12.

The BuckStop™ energy absorber utilizes a 6" pack that deploys when a fall exerts force of approximately 650 lbs. For use with a full body harness w/steel D-Ring dorsal attachment. 1706 locking snap hook on both ends.



BuckStop™



**6' : 5VV116S1
4.5' : 5VV114.5S1
4' : 5VV114S1**

BUCKARREST™

Ideal for users with web dorsal loops.

For users up to 420 lbs., add suffix X4. For Factor II Fall (up to 12' free fall) add suffix X12.

An energy absorber with a flexible shock pack that duplicates the operation of the BuckStop™. The 16" shock pack is covered by a water resistant nylon tube. This model is designed to accommodate a harness with a dorsal web loop. For a 6' model with locking snaps on both ends order: **6VV116S2**.



BuckArrest™



**6' : 64V116S2
4.5' : 64V114.5S2
4' : 64V114S2**

BUCKARREST™

Ideal for users with metal dorsal D-Rings.

For users up to 420 lbs., add suffix X4. For Factor II Fall (up to 12' free fall) add suffix X12.

An energy absorber with a flexible shock pack that duplicates the operation of the BuckStop™. The 16" shock pack is covered by a water resistant nylon tube. This model is designed to accommodate a harness with a steel dorsal D-Ring.



BuckArrest™



**6' : 6VV116S2
4.5' : 6VV114.5S2
4' : 6VV114S2**



BUCK OHM™

DIELECTRIC LANYARDS

Buckingham's new BuckOhm™ line is designed with all dielectric hardware. Dielectric hardware eliminates the potential of static electricity being transferred through steel hardware if working around an energized conductor in wet or damp conditions. Also, Dielectric hardware has a better resistance to corrosion in extreme conditions (hot/humid or salty air environments).

For users up to 420 lbs., add suffix X4. For Factor II Fall (up to 12' free fall) add suffix X12.

BuckOhm™
BuckYard
84+G1D16S1

BuckOhm™
Black BuckYard
84+G1E16S1



Features Include:

- Dielectric locking snap hook on one end and web loop on the other end
- Web loop can be hitched to a dielectric or steel D-Ring. Dielectric snaps can be attached to a web loop (with wear guard), dielectric or steel D-Ring
- Interior materials stretch to reduce the arresting force to less than 900lbs

Meets ASTM F887 Arc Flash Requirements & ANSI Z359.



BuckOhm™
BuckYard
8+G+G1D16S1

BuckOhm™
Black BuckYard
8+G+G1E16S1



Features Include:

- Dielectric locking snap hook on both ends.
- Web loop can be hitched to a dielectric or steel D-Ring. Dielectric snaps can be attached to a web loop (with wear guard), dielectric or steel D-Ring.
- Interior materials stretch to reduce the arresting force to less than 900lbs.

Meets ASTM F887 Arc Flash Requirements & ANSI Z359.



BuckOhm™
BuckYard Stretch
84+G7D16S1

BuckOhm™ Black
BuckYard Stretch
84+G7E16S1



Features Include:

- Dielectric Snap Hook on one end & web loop on other end.
- Web loop can be hitched to a dielectric or steel D-Ring. Dielectric snaps can be attached to a web loop (with wear guard), dielectric or steel D-Ring.
- Interior materials stretch to reduce the arresting force to less than 900lbs.

Meets ASTM F887 Arc Flash Requirements & ANSI Z359.



BuckOhm™
BuckYard Stretch
8+G+G7D16S1

BuckOhm™ Black
BuckYard Stretch
8+G+G7E16S1



Features Include:

- Dielectric locking snap hooks on both ends.
- Web loop can be hitched to a dielectric or steel D-Ring. Dielectric snaps can be attached to a web loop (with wear guard), dielectric or steel D-Ring.
- Interior materials stretch to reduce the arresting force to less than 900 lbs.

Meets ASTM F887 Arc Flash Requirements & ANSI Z359.



Made in the USA



WARNING: Cancer and Reproductive Harm For All Products on Page – www.P65Warnings.ca.gov

BUCKLIMITER™

The all-aluminum BuckLimiter™ retractable features a braking system that is designed for smooth and consistent operation while eliminating that jerky feeling or lock-ups. The BuckLimiter™ is accompanied with 3,600 lb. gate rated

hardware and a tangle-free swivel top that increases overall mobility when working. Available in either Kevlar webbing or Dyneema polymer fiber webbing. Rated to 350 lbs., with an option for a 420 lb. rated unit. *Meets ANSI Z359.12.*



6' Mini BuckLimiter™ 6009-64AA
6' Extension
Rated: 420 lbs.
Weighs 1.5 lbs.



6' Mini BuckLimiter™ 6009K-64AA
6' Extension
Rated: 420 lbs.
Weighs 2 lbs.



6' Mini BuckLimiter™ 6009K-64A+R
6' Extension
Rated: 420 lbs.
Weighs 2 lbs.



7' Kevlar BuckLimiter™ w/Shock Absorbing Pack 6008KQ10
7' Extension
Rated: 420 lbs.
Weighs 1.9 lbs.



7' Tie Back BuckLimiter™ 6008Q7
7' Extension
Rated: 310 lbs.
Weighs 1.9 lbs.



7' BuckLimiter™ 6008-74AA
7' Extension
Rated: 310 lbs.
Weighs 1.9 lbs.



7' Kevlar BuckLimiter™ 6008K-74AA
7' Extension
Rated: 350 lbs.
Weighs 1.9 lbs.



7' BuckLimiter™ w/ Steel Ladder Snap 6008-74D+4
7' Extension
Rated: 310 lbs.
Weighs 3 lbs.



16' BuckLimiter™ 6007-164DV
16' Extension
Rated: 310 lbs.
Weighs 4.6 lbs.



16' BuckLimiter™ 6007-164AA
20' Extension
Rated: 310 lbs.
Weighs 4.6 lbs.



7' Twin Leg Kevlar BuckLimiter™ T6008K-74+EU

The Buckingham Twin Leg BuckLimiter™ yoyo offers two 7' personal fall limiters (PFL) in aluminum alloy housing attached to the Buck PFL Connector. The Buckingham PFL Connector Link is to be used to attach to the dorsal fall arrest attachment of a harness to create a dual retractable lanyard. The unique feature of this design is that it leaves the dorsal attachment available for other uses!

Features Include:

- Dual 7' extension for expanded work area
- Kevlar Aramid fiber 1" webbing – up to 5x stronger than steel. Resistant to moisture, abrasions, UV light and chemicals
- Materials used in this unit are all tested to 40 Cal/CM2 electrical arc exposure
- Rated: 350 lbs.
- Weighs 4.5 lbs.

Retractable lifeline sold separately.

Harness Beam 5203

The answer to OSHA 1910.269 when training (unqualified) wood pole climbers! Unit limits the arresting force to less than 900 lbs. when used in conjunction with a quality retractable lifeline and full body harness. Features full 360° ball bearing rotation for traditional climber training & provides a 5,400 lb. anchor point. Adjustable to fit over a max. 9 1/2" diameter pole top. Arm length (center of pole to arm end) is 36". Eight bolts secure unit to pole and requires no pole drilling. Installation on a 45' class 3 pole takes less than 10 minutes! To fit poles with a 12" diameter top, order model **5203-12**. For a Harness Beam with dual arms, order model **52032**.



HARNES BEAMS & BUCKTRAINER™ GOES WELL WITH:



50' Retractable Lifeline 5201-50

BuckTrainer™ 5204

A reliable apprentice fall protection 5,000 lb. anchor that rotates 250°. For poles from 6" to 9 1/2" in diameter. Ideal to transport to remote areas to field test potential apprentices before sending them to the actual training facility. Ratchet strap to lift BuckTrainer™ with handline, bolts & nuts, mounting brackets and a carabiner (Model **5005**) to mount lifeline.

NOTE: Poles from 6" to 6 1/2" diameter require shims underneath fastening straps whereas larger diameter poles 9" to 9 1/2" must be shaved to accommodate the BuckTrainer. A 45' class 3 pole should accommodate the BuckTrainer™ without shaving the pole.



Retractable lifeline sold separately.



05 AFTER FALL SELF RESCUE



BuckEscape™ Kit 302AFKIT-65

The BuckEscape™ kit is an after fall self-rescue system that includes a specially designed energy absorbing lanyard (PN 6+R+R115R2S2) with built in rescue capabilities and a descent device (302AF-65) that is to be attached to your harness. This system provides the worker with the capabilities to perform a self-rescue from a disabled aerial bucket or if the worker is ejected from the bucket and is suspended from their lanyard. The internal contents consist of a bent D-ring, 2 relief ladder straps and a relief ladder adjustment strap to ascend yourself into the ladder straps, minimizing suspension trauma.

Scan the QR code to view the video!



RESCUE WHEN EJECTED FROM A BUCKET AND SUSPENDED FROM LANYARD:



1. Pull down on deployment tether to release the relief ladder and contents of pack.



2. Step into red ladder loops, pull down on ladder adjustment strap to lift your feet and get into a seated position. Remove descent line, snaphook, descender & carabiner from pack.



3. Connect descent line snaphook to the green D-ring (anchor point) located just below the pack.



4. Connect carabiner attached to descender to harness sternal attachment or repelling loops. **Double check descent line snaphook is attached to green D-ring (anchor point) & descender carabiner is attached to harness.**



5. Disconnect fall arrest attachment snaphook & descend safely to ground. Control speed using one hand on the descender lever and the other hand tailing the descent line.



BuckEscape™ Training Kit 302AFTKIT-65

Buckingham's training version of the BuckEscape™ Kit features all the major components from the BuckEscape™ Kit but is designed specifically for training purposes.

For training purposes only.



Made in the USA



WARNING: Cancer and Reproductive Harm For All Products on Page – www.P65Warnings.ca.gov



BUCK LADDER TETHER

See the NEW BLT video:
[BuckinghamMFG.com/
 videos](https://BuckinghamMFG.com/videos)

Buckingham Manufacturing is proud to announce the Buck Ladder Tether. The BLT is a ladder mounted lifeline system which allows 100% fall protection for the user while ascending or descending a ladder. The BLT utilizes a specially designed Ladder Lashing System to secure the ladder from the ground, to the structure from which you will be working on. The Ladder FP Anchor Strap attaches to the top of the ladder securing the lifeline to the ladder. Assembled onto the lifeline is the

Patent Pending ANSI Z359.15 rated BuckArrester™ system that connects to the users harness and allows them to ascend & descend the ladder while remaining 100% fall protected. In the event of a fall from the ladder, the BuckArrester™ will arrest the fall while the Ladder Lock System keeps the ladder secured to the structure. The BLT must be used with the sternal attachment point of an ANSI Z359.11 compliant full-body harness.



Buck Ladder Tether (BLT) 128R

GOES WELL WITH:



BLT Harness w/Quick Connect Buckles U601A8Q1

or



BLT Harness w/BuckStep™ 2.0 U601A8Q3

or



BLT Harness w/Work Positioning D-Rings U601A3Q1



THE BUCK RFP™

YOUR ONE-STOP SOLUTION FOR FALL PROTECTION ON A ROOF

VISIT BUCKINGHAMMFG.COM/RFP FOR THE BUCK RFP™ VIDEO

Buckingham has been approached by a number of utilities and contractors to address fall protection for those working on a roof or off a ladder at a customer's home. The Buckingham Rooftop Fall Protection Kit provides a temporary vertical lifeline for accessing elevated work areas from a portable ladder. This Patent Pending system was developed hand-in-hand with a major utility and allows the user to set a lifeline and re-direct lines from the ground which keep the user 100% fall protected while ascending a ladder, working on a ladder, and descending a ladder. Today, the Buckingham Rooftop Fall Protection Kit is the only solution of its kind. For more information contact customer service at **1-800-YES-BUCK** or sales@buckinghammfg.com



Rooftop Basic Kit RFPBASIC

Kit Includes:

One **45691G4Q1-150** Basic RFP Storage Bag
One **39Y11Q2-150** 150' 7/16" Diameter Lifeline
One **4560G4** Throwline Storage Bag
One **8452G9VQ1** Fall Protection Lifeline Flag
One **5005** 3,600lb. gate triple action carabiner
One **U601A8Q1** Universal X-Style Harness w/sternal D-Ring & work positioning D-Rings
One **1027G** BuckLaunch™ used to shoot throwline over structure in a safe & controlled manner

One **3904J12-88'** Anchor Sling rated to 5,000lbs. for use w/suitable anchor
One **17-150** 150' of throwline to be used w/throw bag and launched over structure
One **5004BQ2** BuckArrester™ designed to arrest a fall off of a ladder
One **16-12G** 12oz. throw bag to attach to throwline & launch over structure



Rooftop Basic Kit RFPBASIC


When a suitable anchor isn't readily available or a roof exposes the user to a swing fall, we have also developed a Re-Direct & Load-Sharing application that builds on the Basic Kit and gives you a variety of options to deal with the more quirky situations such as the lifeline sliding off the peak or edge, or questionable anchorage requiring the user to share load between multiple anchors.

Kit Includes:


One **45400B4Q2-24** Load Sharing/Re-Direct RFP System Storage Bag
Two **5005** 3,600lbs. gate triple action carabiners
Two **3904-8** 8' anchor slings rated to 5,000lbs. for use w/suitable anchors

Two **39Y8Q3-50** 50' 7/16" Diameter Lifeline
Two **P9J8V+M-34** Anchor Prusiks
Three **P9C6A-10-18** Lifeline Prusiks


RFP™ Basic Kit Application




1. Using BuckLaunch™, launch the throw bag with throwline attached over the structure towards your suitable anchor.



2. Attach the end of the throwline to the anchor eye of the lifeline and pull over the structure towards the anchor.




3. Attach lifeline to suitable anchor.



4. Following manufacturer's instructions & your employer's work practices, install ladder in desired location. Install the BuckArrester™ on lifeline according to Buckingham's instructions, then attach to your harness' sternal D-ring.

RFP™ Re-Direct Kit Application



Depending on the situation the user encounters, the load sharing/re-direct system provides the user with the ability to improvise with the basic system and create a system where you can share multiple anchors and also protect against a potential swing fall.



Made in the USA




WARNING: Cancer and Reproductive Harm For All Products on Page – www.P65Warnings.ca.gov

07 TOOL FALL PROTECTION / TOOL TETHERS

TOOL TETHERS

Dropping tools at height is serious, save yourself the worry of dropping a tool with the Buck Tool Tether lanyard that keeps your tools secured and close to you. Expands smoothly with the user's reach to reduce fatigue and contracts easily to the original length when not in use. Helps workers prevent injury, damage, and lost productivity from dropped tools.

- Stretch cord surrounded by tubular nylon webbing with lock stitching at both ends for extra security.
- Twist locking aluminum carabiner (5005P).
- Adjustable tool loop.
- Conforms to ANSI/ISEA 121-2018
- NOT for fall arrest.

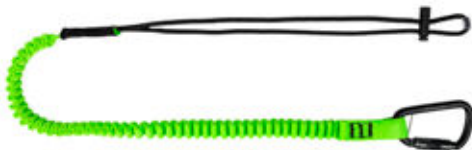



**Buck Tool Tether
600071**

- Maximum safe working capacity: 15 lbs.
- Length: 38 in – 51 in.



**35 lb. Single Leg Tool Tether
600072**

- Maximum safe working capacity: 35 lbs.
- Length: 33 in – 51 in.

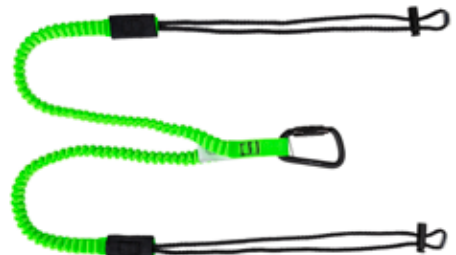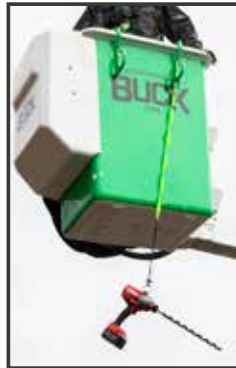

**15 lb. Twin Leg Tool Tether
600073**

- Maximum safe working capacity: 15 lbs. per leg.
- Length: 33 in – 51 in.



**Tool Holder Strap
600081**

A tool holder strap that is designed to be girth hitched or cinched (using the safety green surgical tube slide) to the handle of a battery-operated tool to allow the tool to be stored on an accessory / bucket hook or used as a wristlet.



**Arc Rated Tool Holder Strap
600081K**

An arc rated tool holder strap that is designed to be girth hitched or cinched (using the pre-tied knot) to the handle of a battery-operated tool to allow the tool to be stored on a bucket hook or used as a wristlet.





**Chainsaw Lanyard w/Steel Ring Attachment
25G12A**

Features a 1 3/4" ring for suspension when not in use, an elastic bungee designed for safety and convenience that measures 48" and a tear away safety pack that activates when 200 lbs. of force is applied. 1 1/8" steel ring saddle end attachment.



**Chainsaw Lanyard
w/Carabiner Loop Attachment
25G14A**

Features a 1 3/4" ring for suspension when not in use, an elastic bungee designed for safety and convenience that measures 48" and a tear away safety pack that activates when 200 lbs. of force is applied. 3/4" carabiner loop saddle end attachment.

**Chainsaw Lanyard
w/Bronze Snap Attachment
25G13A**

Features a 1 3/4" ring for suspension when not in use, an elastic bungee designed for safety and convenience that measures 48" and a tear away safety pack that activates when 200 lbs. of force is applied. 1 1/8" bronze snap saddle end attachment.




**Gated Handline Carrier
2402G**

Made of Polymer, it includes a hole to easily secure it to the body belt with a bolt or zip tie (zip tie included). Carrier straightens when approx. 25 lbs. of pressure is applied & up to 35 lbs. when the handline gate is closed.



**Heavy-Duty Gated Handline Carrier
2402GH**

A rigid handline carrier designed to breakaway when approximately 33 lbs. of pressure is applied. With the gate locked, the breakaway strength increases by 10 lbs. Ideal for transmission linemen or when using the OX BLOCK™ and related accessories.



**BuckCarrier™ Chainsaw Carrier
2402B**

Lightweight (2.4oz) aluminum carrier to store your chainsaw on your saddle. It is the lowest profile chainsaw hook on the market. Its compact design makes it nearly impossible to get caught on limbs and branches! *The BuckCarrier™ will now be packed with a clear plastic spacer and a rubber stopper.*



**Magnet Pouch
M4**

The Magnet Pouch was designed to wrap onto 1 3/4" harness webbing or the belt strap on a body belt to allow the user to add on a magnet.

Uses:

- As a lanyard parking attachment point for a lanyard hardware when not in use.
- Store nuts and washers while working.
- In conjunction with PN 600071, 600072, and 600073 Tool Tethers to hold small tools that are tethered to the user out of the way.



Made in the USA



WARNING: Cancer and Reproductive Harm For All Products on Page – www.P65Warnings.ca.gov

OFFICIAL TRAINING PARTNERS

Buckingham Manufacturing is proud to work with the following training partners to provide training on products and systems that we offer.



SAFETYONE
TRAINING

SAFETY ONE TRAINING INC.

Safety One Training was founded with the vision to bring safety and rescue training services to snowcat operators. Since then, the company has grown, and the training programs have expanded into other areas such as utility, telecommunications, governments and military industries, as well as independent contractors. Safety One Training has become a leader in fall protection.

www.safetyoneinc.com



ArborMaster®

See You At The Top!®

ARBORMASTER

ArborMaster Training has been the leader and premier provider of private in-house hands-on customized training programs and regional open-enrollment courses through their innovative Safety, Skill and Productivity education and training for people and organizations who work with, in, and around trees.

www.arbormaster.com



NORTH AMERICAN
TRAINING SOLUTIONS

NATS

NATS mission is to empower people to live and work safely, creating a positive impact, and to be the best version of themselves by inspiring a culture of safety through leadership, sustainability, and integrity. They offer training and educational programs, share knowledge, resources, and tools to increase safety and efficiency in the workplace.

www.northamericantrainingsolutions.com



TOWER SAFETY

Tower Safety and Rescue provide courses with instructors who provide extensive knowledge in rigging, climbing, rescue, and installation. They have SPRAT Level 3 trainers and offer the best of all the rope access industries. Tower Safety is a Cell Tower, SPRAT, and Confine Space and Rescue Safety Training Company providing excellent training in safety and rescue learn, lead and live.

www.towersafety.com



