

BUCKINGHAM
BUCK
1896

HARNESSES / Available in S, M, L & XL



S1 Safety Harness 66772

The S1 Safety harness was designed by the experts at Safety One Training and by Rope Access Technicians to meet the needs of Rope Access Technicians. Includes articulating points at the sternal connection as well as the legs to allow more freedom of movement while working. The umbilical connection point consists of two 5000lbs. min rated web loops that can be used in tandem

or individually to provide multiple connection options.

This lightweight feature packed harness is comfortable for the long hours on the ropes or structures and the versatile design makes this harness the top pick for all your climbing needs.

S1 Batten Seat 1367

Buck R.A.T.H™ Harness 66990

Rope Access Technique Harness designed by Rope Access Technicians with input from the experts at Safety One Training, a Doctor of Physical Therapy and a certified Arborist. Buckingham is pleased to introduce the Buck R.A.T.H™.

Features include:

- Aluminum shoulder strap buckles for easy adjustment while on rope.
- Spectra retainers keep D-Ring rigid for easy connecting and disconnecting.
- Chest ascender retaining strap keeps ascender rigid and properly oriented.
- Abdominal stabilizer keeps lumbar pad properly positioned on the lower back.
- Aluminum D-Rings at the work positioning, sternal, umbilical and dorsal positions help reduce weight.
- Aluminum rings can be used for suspension or work positioning.
- Quick connect buckles on the legs and waist allow for easy donning and adjustment.
- Preformed rigid fiberglass leg supports dramatically decrease pressure in the femoral region while working.



BuckTech™ Tower Harness 68K966

Buckingham's popular BuckTech™ harness has been given a makeover, not only does the BuckTech™ have a new look but we put substantial time into redesigning the seat to make it more comfortable and easier

to change out from the original version. Weighing in at approximately 8 lbs. and loaded with features, the BuckTech is taking tower safety to the next level.

Features include:

- Fully adjustable, removable, padded batten seat.
- Low profile sternal D-Ring for use with mobile fall arrestors & rope grabs.
- Chest strap adjustment buckles to properly position sternal D-Ring to prevent sliding during a fall.
- Adjustable shoulder straps allow for proper positioning of rear dorsal D-Ring
- Quick connect chest and leg straps make the BuckTech™ a breeze to don.
- The Belt strap can easily be removed to add tool or bolt bags
- The dual breakaway loops at waist level provide storage for lanyard hooks when not in use.
- Storage for gear and tools is also located on the rear gear loops.
- Padded broad shoulder strap to more evenly distribute the weight of your gear
- Available in an FR version. Order model **68K966K6**



NEW



**Buck LeverJust™
w/Tough Rope
92CM8-8**


**One-handed adjustment while under load;
eliminates need for a wear guard.**

A light weight Adjustable Positioning Lanyard (APL) designed specifically to allow users to lengthen without removing weight from the lanyard with the use of Buckingham's all new LeverGrab™ Length Adjusting Device (LAD), aluminum hardware and a wear resistant TrebleKern rope.

Buckingham's new wear-resistant Tough Rope is constructed with an energy absorbing nylon core, red braided polyester inner core cover (red wear indicator) and an abrasion and heat resistant Technora outer jacket that eliminates the need for a wear guard. No more jamming of your wear guard!

The new Buckingham LeverGrab™ LAD allows for easy one-handed adjustment. This lightweight APL is easy to use and specially designed for use on Towers, Substation and any structure where wear is an issue.

NEW

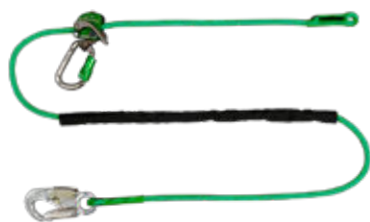

**Buck LeverJust™
9M8-8**

**Allows for one-handed adjustment while
under load.**

The Buck LeverJust™ is a lightweight, all aluminum adjustable positioning lanyard. Featuring Buckingham's new LeverGrab™, a one-handed length adjusting hardware device for easy adjustments under load, when climbing or working. Ideal for Ladder work, secondary use on a pole, substation work, or anything involving steel structures. Key features include:

- ½" Kernmantle rope with red warning center to alert user of excessive wear
- Stitched eye allows user to stow excess tail on a BuckTender or handline hook
- Easily used with your left or right hand
- Adjustable when under load—great for rescue and makes length adjustments easier than ever
- The Buck LeverGrab™ works with ¾" Kernmantle rope, ⅞" TrebleKern Tough Rope
- Aluminum snap hook and carabiner reduce overall weight and meet ANSI requirements for 3600lb. gates
- Meets all applicable ANSI, OSHA and ASTM standards

Available sizes: 6', 7', 8', 9', and 10'. Please contact Buckingham for additional sizes or styles.

Upgrade to TrebleKern Tough Rope, which is nearly indestructible by ordering part number **92CM-8**.



**BuckAdjuster™ w/All
Aluminum Components
9A4+R-8**

**With a Super Fabric sleeve for protection
from excessive wear.**

Aluminum snap hook and carabiner meet ANSI requirements for 3600lb. gates. Twisted eye length adjusting device for proper orientation on the user's body belt. Overall length is 8'. Available in 6' (**9A4+R-6**) and 7' (**9A4+R-7**). Meets applicable ANSI, OSHA and ASTM standards.



**BuckAdjuster™ w/All
Aluminum Components
9+R-8**

**Clear plastic tube protects rope
when in use.**

Aluminum snap hook and carabiner that meet ANSI requirements for 3600lb. gates. Stitched eye allows the user to stow excess tail on a handline hook. Clear plastic tube protects the rope when in use. Overall length is 8'. Available in 6' (**9+R-6**) and 7' (**9+R-7**). Meets applicable ANSI, OSHA and ASTM standards.

ULTIMATE OX KIT

ULTIMATE OX KIT 50061K21

FULLY CUSTOMIZABLE!

Contact us at
sales@buckinghammfg.com
to customize.

The Ultimate Ox Kit is a complete rigging system that puts numerous rigging options at the user's fingertips. For example, the user can create a 4-to-1 mechanical advantage on up to a 50' working height. Similarly, the user can create a 5-to-1 mechanical advantage on up to a 35' working height. The Ultimate Ox Kit fits in a small, self-contained bag and can be stored in the back of a truck with ease. The OX BLOCK™ is a rope snatchblock with an integrated friction bar used for: hurtman/self-rescue, lowering, raising, snubbing loads, it allows the rigging professional to handle loads with greater control. When lowering loads, tension is transferred from the worker to the OX BLOCK™. The patent pending OX BLOCK™ replaces standard handline blocks, parted blocks and various snatch blocks. Has greater WLLs than blocks of similar size. When configured with optional pulleys, the OX BLOCK™ can be used to create a 4:1, 5:1 or 6:1 mechanical advantage reducing the amount of force needed to lift heavy loads. The advantage of the pulleys used by Buckingham is the swivel side plate that allows for quick and easy rope installation without removing the pulley from the connecting device. The OX BLOCK™ is ASME B30 Compliant.

INCLUDES:



OX BLOCK™ Swivel Eye & Carabiner w/4' Sling
50061A-4
Qty: 1



OX BLOCK™ Swivel Eye & Carabiner
50061
Qty: 1



Buck Side Swivel Single Sheath
50071B1
Qty: 1



Rope Bag
4374
Qty: 1



250' Rope
39SAM27Q2-250
Qty: 1



Steel Triple Action Carabiner
5005S3
Qty: 4



BuckLink™ Sling
3903S-6
Qty: 1



Prusik Loop w/Aluminum Ring
P9J8V+M-34
Qty: 2



Buck Side Swivel Double Sheath
50071B2
Qty: 2

PULLEYS, MOBILE FALL ARREST

PULLEYS



**OX BLOCK™
Swivel Eye
50061**

A rope snatchblock with an integrated friction bar used for hurtman/self rescue, lowering, raising and snubbing loads.

WLL: 1500 lbf.



**OX BLOCK™ Clevis Top
w/Buck Pin
50063**

Buckingham's OX BLOCK™ Clevis Top with the newest addition, the Buck Pin. Makes the change out of accessories easier than ever before!

WLL: 1500 lbf.



**Buck Pin
223892R**

An SLIC Pin specifically customized to fit our OX clevis top. The Buck Pin allows the user to add or remove accessories more quickly and easily than the shoulder bolt does.



**BuckRigger™ Single
5007R1**

Single sheave pulley with swivel eye. 1/2" rope capacity.

WLL: 1800 lbf.



**BuckRigger™ Double
5007R2**

Double sheave pulley with swivel eye. 1/2" rope capacity.

WLL: 1800 lbf.



**BuckSorber™2
400000X12**

The BuckSorber™2 is compatible with mobile fall arrest devices and designed to keep peak impact forces below 1350lbs during a 2.5' max fall. The BuckSorber™2 has a max user rating of 350lbs. or two person rating of up to 620lbs. when used for rescue. Rubber lined eyes keep BuckSorber™2 properly oriented on carabiners. *The BuckSorber™2 meets/exceeds ANSI Z359.13 requirements, ASTM F887, OSHA 1926.502 & 1926.954.*

- Arc Flash tested to 40cal/cm², manufactured with Kevlar Webbing
- Cover can be opened for easy inspection
- Specially designed eyes on the BuckSorber™2 keeps the carabiners properly oriented to prevent cross loading the gate
- Can be ordered already attached to Mobile Fall Arrestor **5004L4** (see below) or connected between anchor and lifeline



**Mobile Fall Arrestor
5004L3**

Fits 1/2" & 7/16" Kernmantle rope. High quality aluminum alloy. Rolling cam for better braking. Device moves freely up and down rope until a fall occurs. Steel ANSI rated triple action carabiner.



**Mobile Fall Arrestor
Lock w/BuckSorber™2
5004L4**

Designed to facilitate manipulations during rope ascents. Used in conjunction with a BuckSorber™2 to work at a distance from the rope. Connection arm makes system loss-resistant when passing intermediate anchors. The Mobile Fall Arrestor locks on rope and stops user. Integrated locking function allows user to immobilize device to reduce length of fall. Moves freely along rope without any manual intervention. *To be used with the BuckSorber™2.*

MISC.



**Rope Edge Protector/
Wear Guard**
39C1-7/12

Carabiner loops on both ends
Grommet on one end. Leather
wear piece on bottom.




BuckLink™ Sling
3903S-6

The BuckLink™ is made of
lightweight Spectra material and
each loop is rated to 5000lbs.
With 16 loops, users can adjust
the BuckLink™ sling to form a
rated anchor of any size and help
tackle any situation or need they
encounter while in the field.



BuckLoop™ Rigging Sling
3900E

An endless loop sling with an
outer tubing (that acts as a built-in
wear guard) over an inner red 1"
webbing. If the outer webbing
wears through or is cut, the inner
red webbing becomes visible.
Available in 36", 48", 60", 63" and
72" models.



Buck Tool Tether
600071

The Buck Tool Tether keeps your
tools secured and close. Expands
smoothly with the user's reach to
reduce fatigue and contracts easily
to the original length when not in
use. Helps workers prevent injury,
damage, and lost productivity from
dropped tools.



**BuckTender™
Single Leg**
2404

Keeps excess slack
from tail of the
BuckAdjust™ secondary
lanyard or wood pole
fall restriction device
out of the way while
climbing and working.
Will break away when
approximately 50lbs.
of force is applied.



**BuckTender™
Dual Leg**
2404D

Keeps excess slack
from tail of the
BuckAdjust™ secondary
lanyard or wood pole
fall restriction device
out of the way while
climbing and working.
Will break away when
approximately 50lbs.
of force is applied.



**8MM Warpspeed
16" Endless Loop**
P9C8V-10-16S

A 16" long endless
loop prusik. 8mm.
Dynema Rope.
Minimum breaking
strength of 5000lbs.



**8MM Warpspeed
30" Eye-to-Eye Prusik**
P9J8V-10-30S

A 30" long eye-eye
prusik. 8mm. Dynema
Rope. Minimum
breaking strength of
5000 lbs.



**3/4" SPECTRA
16" Endless Loop**
P9C3-10-16S

A 16" long endless
loop prusik. 3/4"
Spectra. Minimum
breaking strength of
5000 lbs.



Adjustable Foot Sling
5004S1

Designed to be
attached to a handled
ascender. For use
in ascending single
lines.



**Chest Ascender
Retention Strap**
31C

Replaceable web strap
that attaches to your
chest ascender.
Helps to maintain
proper chest ascender
position while climbing.



**RATH Chest Ascender
Retention Strap**
31C1

A replaceable web
strap that attaches
to chest ascender.
Maintains proper chest
ascender position
while climbing. With
leather wear guard to
prevent wear.



**Adjustable Rope Foot
Sling**
5004S2

Designed to be
attached to a handled
ascender. For use
in ascending single
lines.



**Gated Handline
Carrier**
2402G

Includes hole to easily
secure to body belt
with bolt or zip tie (zip
tie included). Carrier
will straighten when
approx. 25lbs. of
pressure is applied
and up to 35lbs. when
gate is closed.



**Heavy Duty Gated
Handline Carrier**
2402GH

Includes hole to easily
secure to body belt
with bolt or zip tie (zip
tie included). Carrier
will straighten when
approx. 33lbs. of
pressure is applied
and up to 43lbs. when
gate is closed.



**BuckCarrier™
Chainsaw Carrier**
2402B

The lowest profile
chainsaw hook on
the market, this
lightweight aluminum
carrier and its
compact design can
be used to carry
practically anything!