





BUCKINGHAM

BUCK

1896

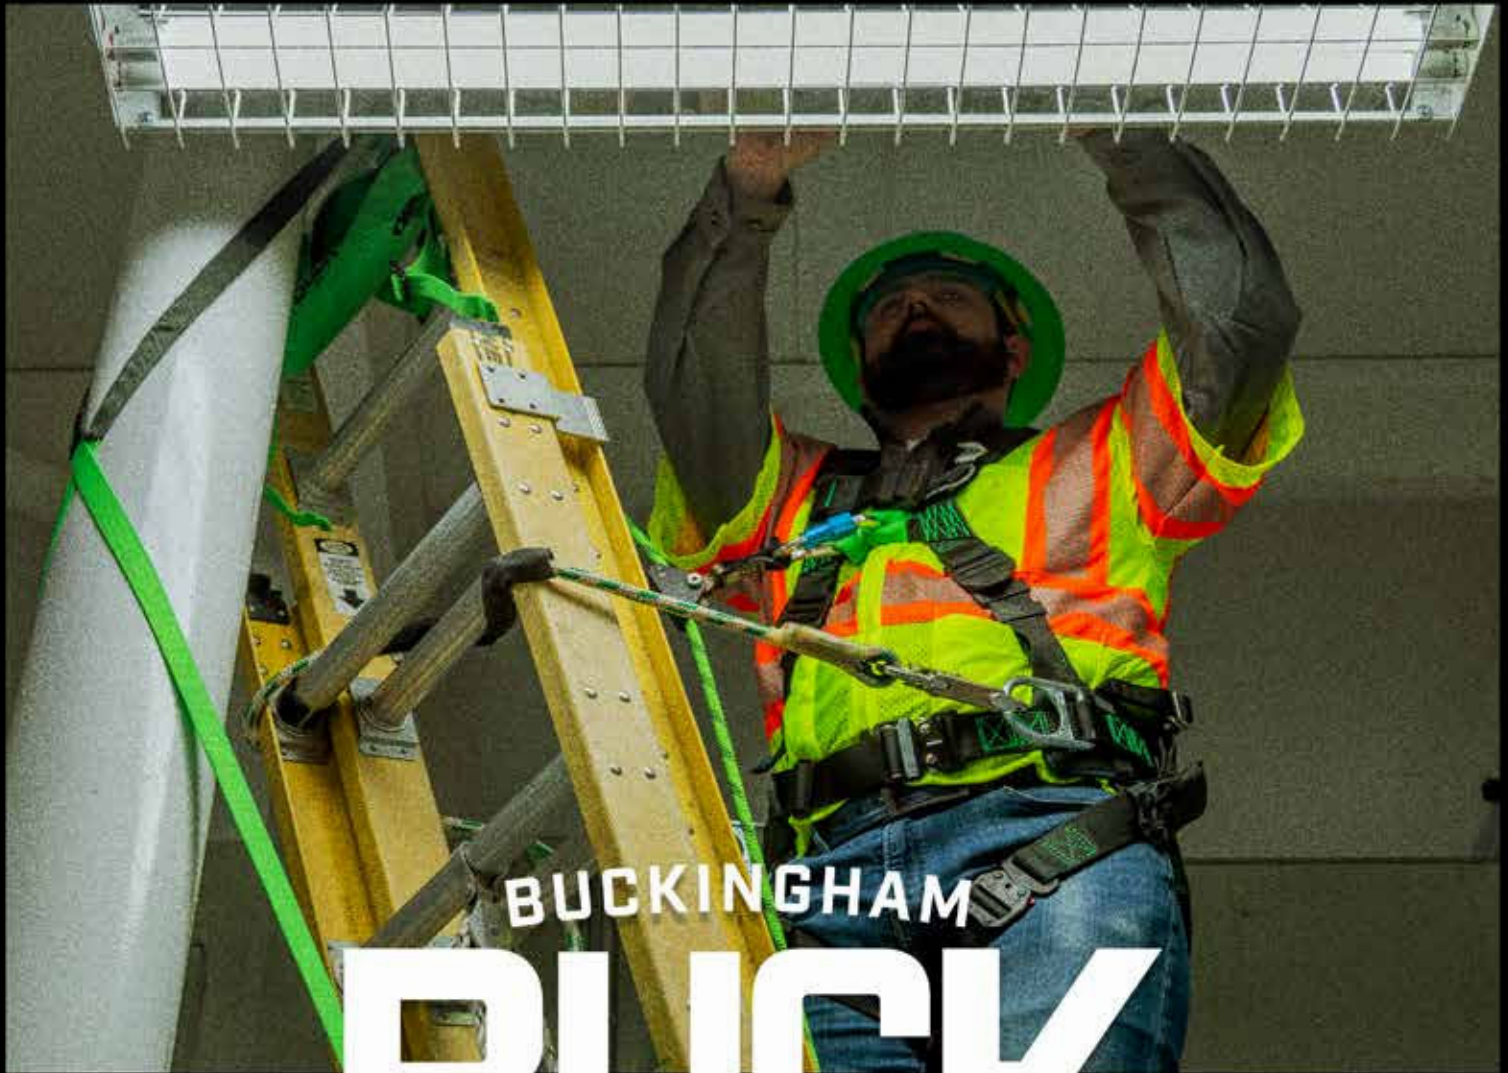

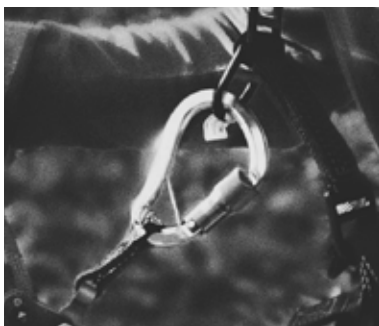

BUCKINGHAM BUCK 1896

For over 130 years, Buckingham Manufacturing has been a trusted manufacturer of equipment and tools for major electric utilities, telecommunications companies, wireless and cable providers, and arborists. Our customers work both above and below ground and we pride ourselves in manufacturing high quality innovative products for those within the market.



PREMIUM PARTNERS



PLATINUM PARTNERS

Buckingham MFG
1-11 Travis Avenue
Binghamton, NY 13904-1690, USA

+1 800 937 2825

BuckinghamMFG.com

Sales@buckinghammfg.com

facebook.com/buckinghammfg
instagram.com/buckingham_mfg
twitter.com/buckingham_mfg
youtube.com/buckmfg
google.com/+buckinghammfg

CONTENTS

*This mini catalog is a sampling of the thousands of products we manufacture.
For our full line, please visit BuckinghamMFG.com*

- 04** HARNESSES
- 07** ENERGY ABSORBING LANYARDS/PFLS/SRLS
- 10** PORTABLE LADDER FALL PROTECTION
- 14** CONFINED SPACE RESCUE/
FALL PROTECTION
- 16** FALL ARREST ANCHOR SLINGS
- 17** TOOL STORAGE
- 19** EQUIPMENT BAGS
- 22** KNIVES/TOOLS/POUCHES & HOLSTERS
- 24** WARNING FLAGS

Buckingham's special niche is to develop products to fit our customers' exact needs. Our real specialty is listening to the exact wants and needs of those industries we support, helping them find a solution to their problem, and then building a high-quality and reliable product with ZERO defects. If you have an interest in customizing any product you see in this catalog or building something to meet your exact specifications, please call 1-800-YES-BUCK and we can take you through that process. Customization is something we thrive on and is the exact reason why we are the world's leading manufacturer of fall protection equipment.



HARNESSES

All harnesses on the following pages are accompanied by a symbol that indicates whether it meets the ASTM F887 Arc Flash Requirements, has a sternal attachment point and whether it is intended for fall restraint, fall arrest, retrieval or work positioning.



FALL
RESTRAINT



FALL
ARREST



WORK
POSITIONING



RETRIEVAL
SYSTEM



STERNAL
ATTACHMENT



MEETS ASTM F887
REQUIREMENTS



Buck H-Style Featherweight™ Harness with BuckStep™ 2.0 68N98JQ1



Features Include:

- Folded, stitched, and leather lined shoulder straps to reduce neck chafing while working overhead.
- Torso adjustment feature no cumbersome web tails.
- Aluminum Quick Connect chest and leg strap buckles.
- Breakaway lanyard parking attachment.
- Rappelling loops for self-rescue purposes.
- Dorsal web loop for connection purposes.
- BuckStep™ 2.0 Suspension Trauma straps.
- Rated to 420 lbs. when used with equivalently rated accessories.



BuckEssential™ Fall Arrest Harness U64C93Q2



Features Include:

- Interlocking chest and leg straps.
- Torso adjustment.
- Reinforced Nylon stitching.
- Secure web loop for reliable fall arrest connection.
- H-Style harness for optimal weight distribution and balance
- Universal sizing for a custom fit.

ECONOMY TRUEFIT™ UNIVERSAL HARNESSES

The unique value of Buckingham's Economy TrueFit™ Harnesses, is that they truly are a universal harness. Now offering the TrueFit™ harness in an economy version that is perfect for those who do not need the BuckOhm™ Dielectric Hardware. Buckingham's TrueFit™ line of harnesses are the ONLY universal harness on the market and can fit sizes S-3X.



Economy TrueFit™ w/Web Dorsal Loop U637F8Q1



Features Include:

- Unique adjustment features on both the front and back of the harness make this a perfect choice if you are looking for a universal harness.
- Hook and Loop chest strap.
- Web loop dorsal attachment.
- Steel friction buckles for harness adjustments.
- Quick connect leg strap buckles for easy donning.
- Harness comes w/energy absorbing lanyard breakaway attachment (ensure ANSI compliance if removing back pad) & leg strap retainers to use if needed.



Economy TrueFit™ w/Backpad & Web Dorsal Loop U68D7FQ1



Features Include:

- Unique adjustment features on both the front and back of the harness make this a perfect choice if you are looking for a universal harness.
- Quick connect chest buckle.
- Steel friction buckles for harness adjustments.
- Web Loop dorsal attachment.
- Lightweight, comfortable and breathable back pad.
- Quick connect leg strap buckles for easy donning.
- Harness comes w/energy absorbing lanyard breakaway attachment (ensure ANSI compliance if removing back pad) & leg strap retainers to use if needed.



Economy TrueFit™ w/Dorsal Steel D-Ring U637F8Q2



Features Include:


- Unique adjustment features on both the front and back of the harness make this a perfect choice if you are looking for a universal harness.
- Hook and Loop chest strap.
- Steel D-Ring dorsal attachment.
- Steel friction buckles for harness adjustments.
- Quick connect leg strap buckles for easy donning.
- Harness comes w/energy absorbing lanyard breakaway attachment (ensure ANSI compliance if removing back pad) & leg strap retainers to use if needed.

BUCKOHM™ TRUEFIT™ DIELECTRIC UNIVERSAL FIT HARNESSES FEATURING 9KV RATED HARDWARE

The unique value of Buckingham's new BuckOhm™ TrueFit™ Harnesses, is that they truly are a universal harness. One size will fit anyone from a small up to a 3XL! Whether your 5' 1" and 130 lbs. or 6' 6" and 325 lbs., this harness will fit you. We haven't seen anyone that it won't fit, but we also haven't taken it to the carnival yet! Unique adjustment features both on the front and back of the harness make this a perfect choice if you are looking for a universal harness.



BuckOhm™ TrueFit™ w/Pigtail U68L7NQ1



Features Include:

- 9KV rated Dielectric hardware.
- Dielectric quick connect chest buckle.
- 18" Dorsal Pigtail w/9KV Dielectric D-Ring
- Lightweight back pad.
- Dielectric quick connect leg strap buckles for easy donning.
- Frontal rescue loops
- Dual trauma straps.
- Harness comes w/energy absorbing lanyard breakaway attachment (ensure ANSI compliance if removing back pad) & leg strap retainers to use if needed.
- Also available in BuckViz Safety Green; use Model **U68L7NQ4**



BuckOhm™ TrueFit™ w/Dielectric D-Ring U68L7NQ2



Features Include:

- 9KV rated Dielectric hardware.
- Dielectric quick connect chest buckle.
- 9KV rated Dielectric dorsal D-Ring.
- Lightweight back pad.
- Dielectric quick connect leg strap buckles for easy donning.
- Frontal rescue loops
- Dual trauma straps.
- Harness comes w/energy absorbing lanyard breakaway attachment (ensure ANSI compliance if removing back pad) & leg strap retainers to use if needed
- Also available in BuckViz Safety Green; use Model **U68L7NQ5**



BuckOhm™ TrueFit™ w/Web Loop U68L7NQ3

Features Include:

- 9KV rated Dielectric hardware.
- Dielectric quick connect chest buckle.
- Web loop dorsal attachment.
- Lightweight back pad.
- Dielectric quick connect leg strap buckles for easy donning.
- Frontal rescue loops
- Dual trauma straps.
- Harness comes w/energy absorbing lanyard breakaway attachment (ensure ANSI compliance if removing back pad) & leg strap retainers to use if needed.
- Also available in BuckViz Safety Green; use Model **U68L7NQ6**



The BLT Harness U601A3Q1

Features Include:

- Universal size.
- Designed for the use with Buckingham's BLT (Buck Ladder Tether) system for fall protection.
- X-Style configuration allows for easier movement when on ladder or in bucket.
- Nylon web loop dorsal attachment.
- Sternal D-Ring attachment for connection with the BLT's ANSI Z359.15 rated Buckingham Mobile Fall Arrestor.
- Interlocking buckles.
- Rated to 420 lbs. when used with equivalently rated accessories.
- Meets the ASTM F887 Electric Arc Performance Requirements.



X-Style Harness w/Quick Connect Buckles U601A8Q1

Features Include:

- Universal size.
- Quick Connect buckles for easy donning.
- X-Style configuration allows for easier movement when on ladder or in bucket.
- Nylon web loop dorsal attachment.
- Sternal D-Ring attachment for connection with the BLT's ANSI Z359.15 rated Buckingham Mobile Fall Arrestor.
- Ideal for female users.
- Rated to 420 lbs. when used with equivalently rated accessories.
- Meets the ASTM F887 Electric Arc Performance Requirements.



TrueFit™ X-Style Harness w/Quick Connect Buckles, Back Pad & Leg Pads U601A8Q4

Features Include:

- Lightweight, comfortable, breathable and most importantly, functional back pad.
- Back/Shoulder pad provides comfort and ease when donning.
- Dual trauma straps.
- Sternal D-Ring.
- Web loop at dorsal location.
- Positioning D-Ring.
- Quick Connect chest strap and leg straps for easy donning.
- Reflective material stitched to the front and back.



**For A Complete Offering of Full Body Harnesses
Visit our website BUCKINGHAMMFG.COM**

02 ENERGY ABSORBING LANYARDS / PFLs / SRLs

BUCKVIZ™ BUCKYARD™ W/ LOCKING SNAP & WEB LOOP

Ideal for users w/web dorsal loops on harness & who want a light/compact shock absorber.

6' models only - For users up to 420 lbs., add suffix X4. For Factor II Fall (up to 12' free fall) add suffix X12.

For a full body harness w/a dorsal web loop we recommend a corresponding nylon loop on one end of energy absorber with a 1706 locking snap hook on the other end. To order an energy absorber with locking snaps on both ends: 6': **8VV1D16S1**. Meets applicable OSHA, ASTM and ANSI Requirements



BuckYard™
6' : **84V1D16S1**



Goes well with Economy TrueFit™ Harnesses on page 4

BUCKVIZ™ BUCKYARD™ W/2 LOCKING SNAPS

Ideal for users w/steel dorsal D-Ring on harness & who want a light/compact shock absorber.

6' models only - For users up to 420 lbs., add suffix X4. For Factor II Fall (up to 12' free fall) add suffix X12.

For a full body harness w/steel D-Ring dorsal attachment we recommend a corresponding energy absorber with 1706 locking snap hooks on both ends. To order an energy absorber with locking snap on one end and web loop on the other end: 6': **84V1D16S1**. Meets applicable OSHA, ASTM and ANSI Requirements



BuckYard™
6' : **8VV1D16S1**



Goes well with Economy TrueFit™ Harnesses on page 4

BUCK OHM™ DIELECTRIC LANYARDS

Goes well with BuckOhm™ TrueFit™ Dielectric Universal Fit Harnesses on page 5.

Buckingham's new BuckOhm™ line is designed with all dielectric hardware. Dielectric hardware eliminates the potential of static electricity being transferred through steel hardware if working around an energized conductor in wet or damp conditions. Also, Dielectric hardware has a better resistance to corrosion in extreme conditions (hot/humid or salty air environments).

For users up to 420 lbs., add suffix X4. For Factor II Fall (up to 12' free fall) add suffix X12. Meets ASTM F887 Arc Flash Requirements & ANSI Z359.



BuckOhm™
BuckYard
84+G1D16S1



Features Include:

- Dielectric locking snap hook on one end and web loop on the other end
- Web loop can be hitched to a dielectric or steel D-Ring. Dielectric snaps can be attached to a web loop (with wear guard), dielectric or steel D-Ring
- Interior materials stretch to reduce the arresting force to less than 900 lbs.



BuckOhm™
BuckYard
8+G+G1D16S1



Features Include:

- Dielectric locking snap hook on both ends.
- Web loop can be hitched to a dielectric or steel D-Ring. Dielectric snaps can be attached to a web loop (with wear guard), dielectric or steel D-Ring.
- Interior materials stretch to reduce the arresting force to less than 900 lbs.



BuckOhm™
BuckYard Stretch
8+G+G7D16S1



Features Include:

- Dielectric locking snap hooks on both ends.
- Web loop can be hitched to a dielectric or steel D-Ring. Dielectric snaps can be attached to a web loop (with wear guard), dielectric or steel D-Ring.
- Interior materials stretch to reduce the arresting force to less than 900 lbs.

BUCK COMBOYARD™



Meets ASTM
F887 Electric
Arc Performance
Requirements.

The ComboYard™ combines the best features of various lanyards on the market and can accommodate any size angle iron. Features a 5' dual tie-back lanyard with wear guard and a 12' fall (Force Factor II) ANSI rated shock absorber and rescue loops for quick, easy and safe rescue. Includes Tie Back Snaps with 5,000 lb.

rated gate, two ANSI 3,600 lb. gate Big BuckSnaps™ that attach around angle iron up to 4". Meets OSHA 1926.954, ANSI Z359.13-09 and ASTM F887-13 Arc Flash Requirements.




V Style Energy Absorbing Lanyard 8V6716D+4S1X12

Lanyard with an elastic core, minimizing length while relaxed. Features two 12' fall (force factor II) energy-absorbing legs. 6' overall length. Double locking pelican hooks that have a 2 1/2" gate opening. Meets/exceeds ANSI Z359.13, ASTM F887 and OSHA electric arc performance requirements.




HOW TO

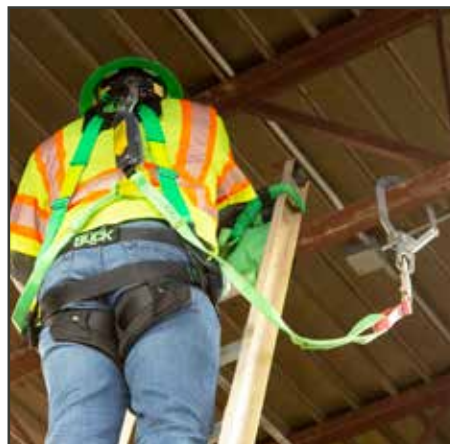


BUCKLIMITER™

The all-aluminum BuckLimiter™ retractable features a braking system that is designed for smooth and consistent operation while eliminating that jerky feeling or lock-ups. The BuckLimiter™ is accompanied with 3,600 lb. gate rated hardware and a tangle-free swivel

top that increases overall mobility when working. Available in either Kevlar webbing or Dyneema polymer fiber webbing. Rated to 350 lbs., with an option for a 420 lb. rated unit. *Meets ANSI Z359.12.*

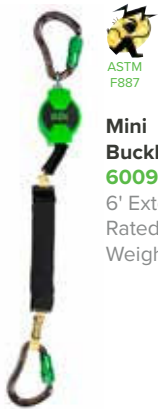

Mini BuckLimiter™
6009K-64AA
6' Extension
Rated: 310 lbs.
Weighs 2 lbs.

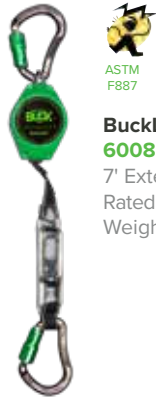

BuckLimiter™
6008KQ10
7' Extension
Rated: 420 lbs.
Weighs 4 lbs.




Tie Back BuckLimiter™
6008Q7
7' Extension
Rated: 350 lbs.
Weighs 3.2 lbs.



Mini BuckLimiter™
6009-64AA
6' Extension
Rated: 420 lbs.
Weighs 2 lbs.



BuckLimiter™
6008-74AA
7' Extension
Rated: 350 lbs.
Weighs 4 lbs.



BuckLimiter™
6008K-74AA
6' Extension
Rated: 310 lbs.
Weighs 4 lbs.



BuckLimiter™
6008-74D+4
7' Extension
Rated: 350 lbs.
Weighs 4 lbs.



Lightweight Retractable
6007-164DV
16' Extension
Rated: 350 lbs.
Weighs 4.6 lbs.



BuckLimiter™
6008-74DV
7' Extension
Rated: 350 lbs.
Weighs 2 lbs.




Kevlar BuckLimiter™
6006K-104AA
10' Extension
Rated: 420 lbs.
Weighs 1.9 lbs.



Mini BuckLimiter™
6009-64DV
6' Extension
Rated: 420 lbs.
Weighs 1.5 lbs.
without hardware



Mini BuckLimiter™
6009-64AV
6' Extension
Rated: 420 lbs.
Weighs 1.5 lbs.
without hardware

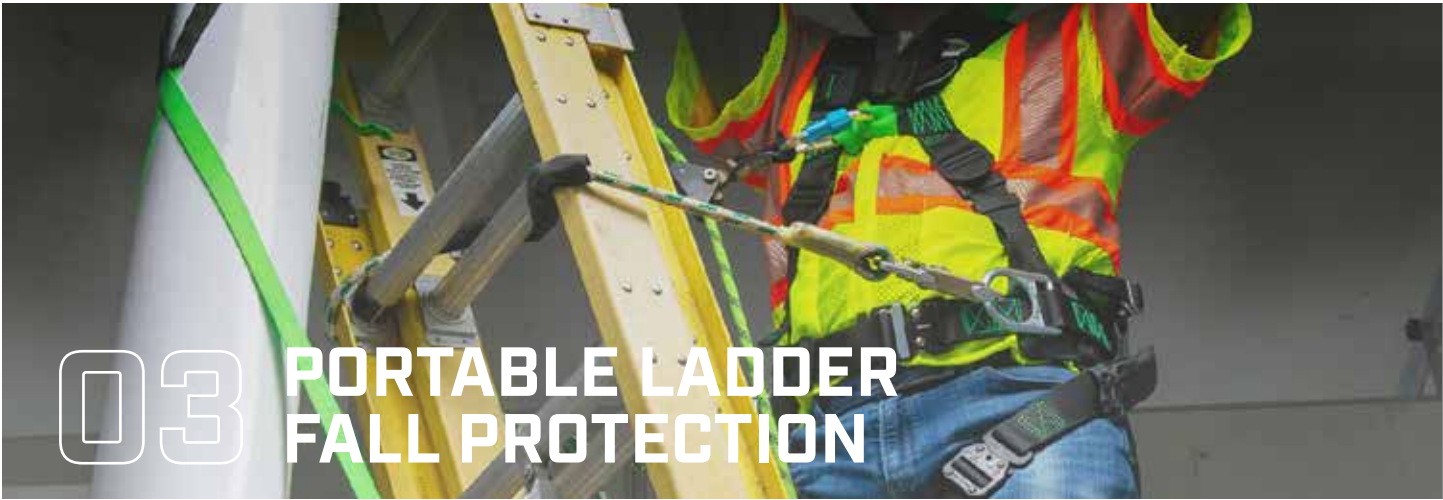

03 PORTABLE LADDER FALL PROTECTION

BUCK LADDER TETHER


See the NEW BLT video:
BuckinghamMFG.com/videos

Buckingham Manufacturing is proud to announce the Buck Ladder Tether. The BLT is a ladder mounted lifeline system which allows 100% fall protection for the user while ascending or descending a ladder. The BLT utilizes a specially designed Ladder Lashing System to secure the ladder from the ground, to the structure from which you will be working on. The Ladder FP Anchor Strap attaches to the top of the ladder securing the lifeline to the ladder. Assembled onto the lifeline is the **Patent Pending** ANSI Z359.15

rated BuckArrester™ system that connects to the users harness and allows them to ascend & descend the ladder while remaining 100% fall protected. In the event of a fall from the ladder, the BuckArrester™ will arrest the fall while the Ladder Lock System keeps the ladder secured to the structure. The BLT must be used with the sternal attachment point of an ANSI Z359.11 compliant full-body harness. BLT can be used on a pole or on a steel lattice.



Buck Ladder Tether (BLT)
128R

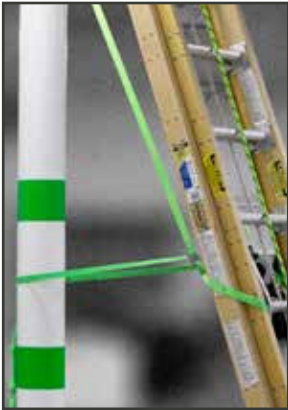

Lower Attachment



Upper Attachment



Mobile Fall Arrester/Lifeline

GOES WELL WITH:





BLT Harness w/BuckStep™ 2.0
U601A8Q3

or



BLT Harness w/Work Positioning D-Rings
U601A3Q1

THE BLT LADDER SET UP

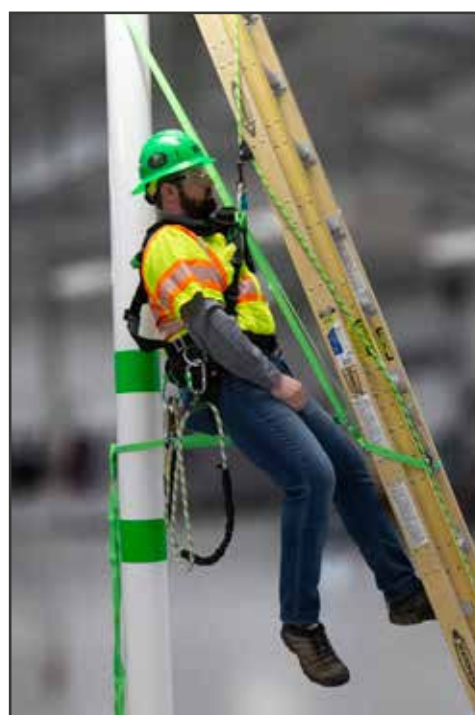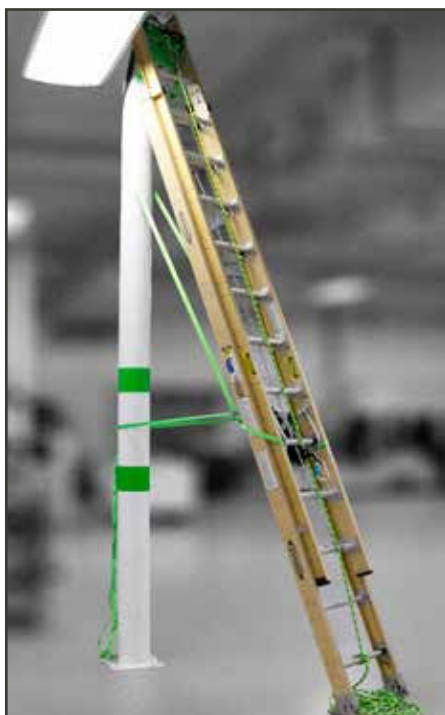

THE BLT ON STEEL LATTICE



1. Once ladder is in place, use telopole to lift BLT straps over lattice.



2. Pull straps down using telopole.



3. Cross straps.



4. Attach straps to rails on ladder.



5. Attach carabiner of mobile fall arrester to sternal D-Ring on harness.



6. Climb ladder using company work practices.

LADDER LOCK SYSTEM

Goes great with the BLT!

Ladders and rounded poles are potentially dangerous combinations. Buckingham offers a safety solution that includes ladder safety straps that can be stored/enclosed in tough storage bags attached to your ladder for easy access. No more forgetting the safety straps in the vehicle or the garage. The straps are ready for deployment when the ladder goes up.

Buck Ladder Lock System COMPLETE
355BT



Top Bag & Ladder Lashings ONLY
355T

Bottom Bag & Ladder Lashings ONLY
355BG9



Buck Ladder Lock System Includes:

- Complete ladder lock system, Top and Bottom bags with Straps.
- Prevents Kick out and excessive rocking
- Designed for Poles and Trees
- Bags do not interfere with climbing space
- Doesn't interfere with ladder storage
- Highly visible brightly colored bags to remind technicians of deployment.
- Quick Access to Straps
- Weather resistant storage bags



2-D TrueFit™ Belt
1998C

Patent-pending, fully adjustable, 2-D TrueFit™ belt that allows your dee size to be adjusted between sizes 20-30. Offers an adjustable dee piece/gut strap that allows the user to customize the size of the belt at any given moment.

- Can be retrofitted directly to any 'H' or 'X' style full-body harness.
- Quick connect belt strap buckle for quick and easier donning.
- Steel D-Rings.
- Lightweight, just 2.5 lbs.!
- A narrow back pad measuring 4 1/4" wide.
- The back pad features 2 layer of Arc Tested material that is constructed with hook and loop connecting material that aids in the dee size adjustment.



Ladder Belt
38523Q12

This Buck Ladder Belt provides all the features of a traditional body belt but in a smaller version designed for mobility on a ladder.



BuckAdjuster™ w/All Aluminum Components
9A4+R-8

Aluminum snap hook and a triple-locking carabiner that meets applicable ANSI, OSHA and ASTM standards.



16' Telescopic Hot Stick
491133

- 16' Telescopic Hot Stick
- Universal Head Attachment
- Used to connect BuckHook™ or BLT for Ladder Fall Protection Systems

04 CONFINED SPACE RESCUE & FALL PROTECTION

CONFINED SPACE RESCUE KIT

These unique systems allow for a rescue to be accomplished without having to send additional personnel into the hazardous area. Entrant suited with a full body harness (model **603S8Q211**) enters the confined space with or without being tethered.

Non-Tethered Rescue:


Non-Tethered Confined Space Rescue Kit **105Q2-30**

INCLUDES:

- One manhole guard.
- One winch.
- One 16' telescopic fiberglass pole.
- One **39SAM13Q9-30** Rescue Line Kit:
 - Two 30' lifelines
 - Model **40** telescopic pole adapter
 - Rope bag



For non tethered rescue, the attendant/rescuer uses the rescue line system (**39SAM13Q9-30**). The rescue line equipped with a carabiner is attached to a 16' telescopic pole via the telescopic pole adapter (model **40**). The adapter releases the carabiner once the rescuer locates one of four reflective rescue loops, "hooks" into a loop and pulls back on the pole. The rescue line is then tied on to the winch and the rescuer then proceeds to raise the victim.

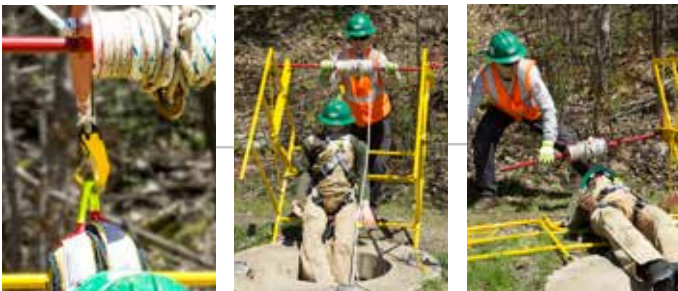

Tethered Rescue:

Tethered Confined Space Rescue Kit **105Q1-30**

INCLUDES:

- One manhole guard.
- One winch.
- One **39SAM13Q3-30** Rescue Line Kit (One 30' lifeline with ascender, breakaway assembly & rope bag).



For a tethered rescue, the attendant/rescuer uses the rescue line system (**39SAM13Q3-30**). Entrant enters the confined space with a lifeline (**39SAM13Q1**) attached. The lifeline is attached to the manhole guard/rescue winch with a specially designed breakaway assembly. This device will release upon impact such as that of a vehicle which has entered the work zone and strikes the manhole guard. For rescue, the attendant/rescuer attaches the ascender to the winch line and proceeds to raise the victim.



SEE THE VIDEOS: BUCKINGHAMMFG.COM/VIDEOS



**Tripod for
Confined
Space
Retrieval
System
5003**

When entering a confined space, a worker must be attached to an independent lifeline for adequate fall protection and retrieval. Buckingham's retrieval systems exceed all

current OSHA and ANSI requirements. Read and follow the users manual enclosed with every system.

A COMPLETE RETRIEVAL SYSTEM SHOULD INCLUDE:

- A man rated winch to be attached to personnel at all times during the descent and work below grade
- Tripod (**5003**)
- Full Body Harnesses (See Harness Section)
- Work Winch to raise and lower materials only (**5000**) (**5010**)

Tripod, man rated winch and work winch are purchased separately



**BuckOhm™ Confined Space Harness
68M9EQ2**

Features Include:

- 9KV dielectric hardware. *Chest D-Ring rated at 3KV.
- H Style Harness.
- Lightweight, comfortable, breathable and most importantly, functional back pad.
- Web loops at the dorsal location.
- Quick Connect legs straps for easy donning.
- 5 Reflective web loops.
- Back/shoulder pad provides comfort and ease when donning.
- Rated to 420 lbs. when used with equivalently rated accessories.
- Meets ASTM F887 and ANSI Z359 standards.
- Available in S, M, L, X.



**The BuckTrievery™
603S8Q211**

Features Include:

- An energy-absorbing lanyard breakaway attachment (ensure ANSI compliance if removing the back pad) & leg strap retainers to use if needed.
- Web loop at sternum.
- Quick Connect buckles for easy donning
- 3 reflective retrieval loops.
- 2 reflective loops at hips.
- Padded leg and shoulder straps.
- Ideal for female users.
- Meets ASTM F887 and ANSI Z359 standards.
- User weight capacity of 130 - 310 lbs.
- Available in S, M, L, XL.



**Confined Space Rescue Strap
82**

Features Include:

- Keeps the victim in an upright position.
- Easily donned by the rescuer or victim to facilitate rescue.
- Three different loops for half hitching strap around the victim.
- Straps that go around the victims legs to prevent slip through.
- Two loops at each end of the strap used for raising the victim.
- Measures 62" L x 4" W.
- Max user weight of 420 lbs.

**FOR RESCUE ONLY
NOT FOR FALL ARREST**



TEMPORARY
ANCHORS



Temporary Anchor
3901-LENGTH

Create a temporary anchor point by half-hitching around a suitable structure. Rated to 5,000 lbs.

Available Lengths
6' : 3901-6
12' : 3901-12



Temporary Anchor
3902-LENGTH

Small Dee to pass through a larger Dee making a secure anchor. Rated to 5,000 lbs.

Available Lengths
2' : 3902-2 **4' : 3902-4**
3' : 3902-3 **6' : 3902-6**

LIGHTWEIGHT
SUSPENSION SLING



**Lightweight
Suspension Sling**
39021J12-2

For use as a personal anchor for human support. Can be choked or basket hitched. Comes w/wear protector for wrapping around sharp objects & increases the life of sling.



WIRE SLING



Wire Sling
3909-3

3/8" eye to eye wire sling.



06

TOOL STORAGE


BUCK TOOL TETHERS

NOT FOR FALL ARREST

Dropping tools at height is serious, save yourself the worry of dropping a tool with the Buck Tool Tether lanyard that keeps your tools secured and close to you. Expands smoothly with the user's reach to reduce fatigue and contracts easily to the original length when not in use. Helps workers prevent injury, damage, and lost productivity from dropped tools.

Features:

- Stretch cord surrounded by tubular nylon webbing
- Lock stitching at both ends for extra security
- Twist locking aluminum carabiner
- Adjustable tool loop
- Length: 38 in – 51 in.
- Helps prevent injuries to workers below due to dropped tools.
- Conforms to ANSI/ISEA 121-2018

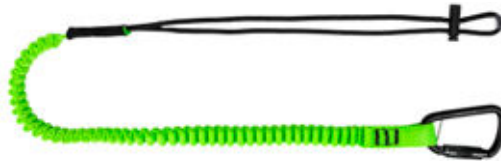

Buck Tool Tether
600071

Maximum safe working capacity: 15 lbs.



Buck Tool Tether
600072

Maximum safe working capacity: 35 lbs.

BUCKET HOOK W/TETHER HOLE

The newly designed bucket hook can fit up to a 2 1/2" bucket lip and now features a tool tether connection eye. The tether connection eye allows for the Buck Tool Tether **600071** to be attached for extra tool fall protection.

Features:


- An outside hook with a 2 1/2" hook opening.
- 40 lb. WLL (3:1 safety factor).
- 2 inside accessory hooks w/30 lb. WLL.
- 3/4" inside opening.



Bucket Hook w/Tether Hole
2410



Bucket Hook w/Tether Hole & Tool Tether
2410T

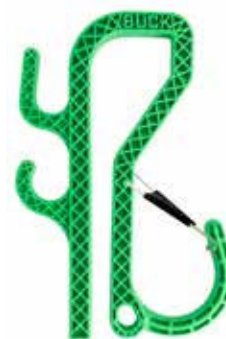

Bucket Hook w/Tether Hole & Gate
2410G



Bucket Hook w/Tether Hole, Gate & Tool Tether
2410GT

HANDLINE CARRIERS



Gated Handline Carrier 2402G

The Gated Handline Carrier is made of Polymer and includes a hole to easily secure it to the body belt with a bolt or zip tie (zip tie included). The carrier will straighten when approximately 25 lbs. of pressure is applied and up to 35 lbs. when the handline gate is closed, allowing the handline to pull free.

Heavy-Duty Gated Handline Carrier 2402GH

The Heavy-Duty Gated Handline Carrier is a rigid handline carrier designed to breakaway when approximately 33 lbs. of pressure is applied. With the gate locked, the breakaway strength increases by 10 lbs. Ideal for transmission linemen or when using the OX BLOCK™ and related accessories.



BuckCarrier™ Chainsaw Carrier 2402B

The BuckCarrier™ is a lightweight (2.4oz) aluminum carrier designed to store your chainsaw on your saddle. It is the lowest profile chainsaw hook on the market and its compact design makes it nearly impossible to get caught on limbs and branches like other chainsaw carriers on the market. Can be used to carry practically anything!

TOOL APRONS



Aerial Basket Tool Apron 4500YG9

A heavy vinyl aerial basket tool apron with sewn-in pockets through two layers of vinyl coated nylon. Three large ¾" grommets reinforced with PVC rods that suspends the apron from the bucket using Buckingham PVC or polymer hooks. Has a sewn in stiffener and 2 pocket holsters, a hammer loop. Features 2 nut and bolt bags, 11 socket pockets and 2 PVC pipe inserts for auger bit holders. Hooks are not included.



13 Pocket Hi-Vis Tool Apron w/Hot Stick Holder 4500YG9M2P8

A heavy vinyl aerial basket tool apron has sewn in pockets through two layers of vinyl coated nylon. Features:

- Three large ¾" grommets reinforced with PVC rods that suspends the apron from the bucket using Buckingham PVC or polymer hooks.
- Leather knife pouch with snap for hanging your knife.
- 8" magnetic strip that allows the lineman to store loose hardware and easily access it when required.
- Has a sewn in stiffener and 2 pockets holsters.
- Hammer loop.
- Features 2 nut and bolt bags.
- 11 socket pockets.
- 1 PVC pipe insert for auger bits.
- 1 Hot Stick Holder.



THE BUCKPACK PRO™

The BuckPack™ Pro 4377

After years of development, we are proud to introduce a truly one of a kind gear bag that has been designed from the ground up to be the most versatile and feature packed gear bag available on the market!

Features:

- Constructed from heavy-duty waterproof vinyl and cordura material.
- High-grade zippers.
- 12 separates rows of Molle loops throughout the bag.
- Numerous storage & access options that will not be found on any other gear bag including:
 - Massive front pocket to easily access gear.
 - Large upper pocket for helmet, gloves, and other gear you may want to easily access.
 - Rope access pocket allows you to access your rope without having to empty the bag of it contents. Great for access in the rain!
 - Pockets for climbers to save space & prevent accidental puncture of bag or gear.
 - Top access pocket w/drawstring closure to store/separate gear in top portion of bag.
 - Shoulder strap storage pocket.
 - Large back pocket for laptops or documents.



BUCK
BIG MOUTH BAG

The Buck Big Mouth Bag is a new and improved equipment bag with an extended wide mouth (15 ½" x 22") to make it easier and faster for workers to store all of their PPE, gear, tools, and other items in their bag with ease. No more struggling to get your essentials into your bag and no more fighting to get it closed. To order with wheels, add **W1** to P/N.



Buck Big Mouth Bag | Standard Bag



Buck Big Mouth Bag
(Safety Green)
47333G9R5S



Buck Big Mouth Bag
(Black)
47333B3R5S

Lockable option w/two lock holes at left and right of bag closure for pad lock or cable lock available. Use P/N's **47333G9L3R5S/47333B3L3R5S**
***Pad lock shackle must have height greater than 1 ¼".*



15" (bottom), 18" (top)

The BuckPack™
4470G9



24"
22"

Big BuckPack™
4471B3

**BuckPack™ & Big BuckPack™
Equipment Backpacks**

**Various models, sizes, colors and
patterns also available.**

The BuckPack™ & Big BuckPack™ Equipment Backpacks are large enough to carry all the equipment of a traditional tool bag. All pockets have hook and loop closures.

Features padded shoulder straps with adjustable chest strap. Zipped raw flap is designed to keep water out of bag. Carry handles located at the top of bag.

**BuckViz™ Buckingham Mesh Equipment Bag
45400G10**

The popular Buckingham mesh equipment bag has a new look. Now available in Hi-Vis Green comes in a variety of different sizes for every piece of equipment from small tools and hardware to saddles, rope and climbers our mesh bags can hold it. Buckingham's mesh bag makes it easy to locate items within the bag while allowing airflow pass through to keep things from smelling after a day in the field. Airflow allows for equipment to dry while being stowed. Extremely lightweight. Easily find equipment in your bag without digging everything out.



Suffix:	-9	-12	-18	-24
Measures:	5" dia. x 9" L	9.5" dia. x 12" L	9.5" dia. x 18" L	9.5" dia. x 24" L

**Oval Bucket**
121615CH1L

- Hard canvas body with molded top rings and nylon web handles.
- Has 14 outside tool pockets and 15 inside pockets.
- Bucket hooks not included.
- Measures 14" L x 6 ½" W x 10" H

**Small Tool Bag**
506

Bucks mini equipment/tool bag fits all your smaller equipment and tools with ease.

- Constructed of a heavy canvas for maximum durability.
- Heavy duty zipper closure.
- Strong 1" nylon web carry handles.
- Measures 10" H x 7" W x 10" D.

**Canvas Bucket**
12162

Heavy canvas bucket that features 15 inside tool pockets and 2 polypropylene ropes connected to a heavy snap for suspension. Molded top rings. Heavy durable thread that will not rot. Measures 10.5" x 7".

**Canvas Bucket**
1215G9

Canvas bucket made with heavy canvas construction with a solid continuous PVC ring in top and has a molded rubber bottom. A polypropylene rope with 4958 brass swivel snap. Features an 8" x 8" pocket.

10 KNIVES/TOOLS/ POUCHES & HOLSTERS



Buckingham BuckFold™ Skinning Knife

7092

Generously sized handle makes this ideal for gloved hands
OAL: 10.2"

For version with blunt blade, order model **70922**



Buckingham BuckViz™ ErgoBlade™ Skinning Knife

7091G

The round handle allows the user to create the proper cutting angle by rotating the knife within the hand instead of constantly and repetitively turning the wrist.
OAL: 9 5/8".

For version with notch in blade, order model **70913G**



Buckingham ErgoBlade™ Skinning Knife

7091

The round handle allows the user to create the proper cutting angle by rotating the knife within the hand instead of constantly and repetitively turning the wrist.
OAL: 9 5/8".

For version with notch in blade, order model **70913**



Buckingham Skinning Knife

7089

Hard plastic red handle fits shotguns for remote skinning.
OAL: 9 1/2".

For version with notch in blade, order model **70893**



Buckingham Skinning Knife

7086

Hard plastic transparent yellow handle.
OAL: 8 7/8".

For version with notch in blade, order model **70863**





Knife Pouch
7058CK

A pouch that consists of a 7088 knife and the 7085 scissor. Features two pockets. Measures 7.5" L x 2" W.



Knife Kit
7058L

A knife holster kit that includes a 7088 knife. Features belt loops and 1 pocket. Measures 2" W x 7 1/2" L.



Knife Sheath
4079

Measures 9.5" x 3". Easily attachable to a belt with accessible belt loops.



Miscellaneous Holster
4023

Features 3 pockets. Measures 11.25" H x 6.25" W.



Nut & Bolt Bag
4570B2M2

Made from quality heavy Canvas. Designed for easy excess to small hardware while in or off the field. Lightweight and easy to attach and detach from body belts or any other form of carry with our snap and D-ring connection. Features a magnet, reinforced top and drain holes Available without a magnet model 4570.



Trouser Belt
6282

Leather belt featuring stitched edges, a belt end keeper, and a single prong silver-tone buckle that provides a secure fit. Available sizes: 32, 34, 36, 38, 40, 42, 44 and 46.

11 WARNING FLAGS



RFP Warning Flag
8452G9VQ1

Hi-Visibility green RFP warning flag with two reflective strips for easy visibility when working at night. Hook and loop strap for a secure attachment. Features a 6.5" x 6.5" clear vinyl pocket on backside for crew, truck or company information. PVC stiffener on top.

Clearance Point Flag
8451G7P5VQ2

Hi-visibility green Clearance Point flag with two reflective strips for easy visibility when working at night. Hook and loop strap for a secure attachment. A 6.5" x 6.5" clear vinyl pocket on backside for crew, truck or company information. PVC stiffener on top.
Measures 18" H x 19.5" W.



Danger Flag
8451G7P5V

Hi-visibility green DANGER flag with two reflective strips for easy visibility when working at night. Hook and loop strap for a secure attachment. A 6.5" x 6.5" clear vinyl pocket on backside for crew, truck or company information. PVC stiffener on top.
Measures 18" H x 16.5" W

Danger Red Flag
8457R3

Hi-visibility red danger flag with two reflective strips on front and back for easy visibility when working at night. Hook and loop straps for a secure attachment. Includes truck/radio # and service location lettering along the top.
Measures 18" H x 19.5" W.



Grounds Flag
8454O3V

Hi-visibility orange with two reflective strips on front and back for easy visibility when working at night. Hook and loop straps for a secure attachment. Wire attachment for hot line clamp on top and PVC stiffener on bottom. Includes truck/radio # and service location lettering along the top.
Measures 18.5" H x 16.5" W



