




BUCKINGHAM
BUCK
1896



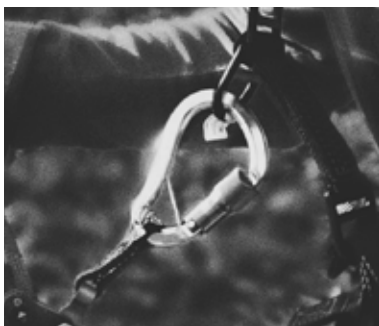

BUCKINGHAM
BUCK
 1896

For over 125 years, Buckingham Manufacturing has been the world's leading and most trusted manufacturer of equipment and tools for major electric utilities, telecommunications companies, wireless and cable providers, and arborists. Our customers work both above and below ground and we pride ourselves in manufacturing the highest quality and most innovative products on the market.



PREMIUM PARTNERS



PLATINUM PARTNERS

Buckingham MFG
 1-11 Travis Avenue
 Binghamton, NY 13904-1690, USA

+1 800 937 2825

BuckinghamMFG.com

Sales@buckinghammfg.com

facebook.com/buckinghammfg
 instagram.com/buckingham_mfg
 twitter.com/buckingham_mfg
 youtube.com/buckmfg
 google.com/+buckinghammfg

CONTENTS

*This mini catalog is a sampling of the thousands of products we manufacture.
For our full line, please visit BuckinghamMFG.com*

- 04** HARNESSES
- 07** ENERGY ABSORBING LANYARDS/PFLS/SRLS
- 10** PORTABLE LADDER FALL PROTECTION
- 15** CONFINED SPACE RESCUE/
FALL PROTECTION
- 17** FALL ARREST ANCHOR SLINGS
- 18** TOOL STORAGE
- 20** EQUIPMENT BAGS
- 22** POUCHES/HOLSTERS
- 23** KNIVES & TOOLS
- 24** WARNING FLAGS

Buckingham's special niche is to develop products to fit our customers' exact needs. Our real specialty is listening to the exact wants and needs of those industries we support, helping them find a solution to their problem, and then building a high-quality and reliable product with ZERO defects. If you have an interest in customizing any product you see in this catalog or building something to meet your exact specifications, please call 1-800-YES-BUCK and we can take you through that process. Customization is something we thrive on and is the exact reason why we are the world's leading manufacturer of fall protection equipment.



ECONOMY TRUEFIT™ BUCKINGHAM UNIVERSAL FIT HARNESSES

The unique value of Buckingham's Economy TrueFit™ Harnesses, is that they truly are a universal harness. We are now offering the TrueFit™ harness in an economy version that is perfect for those who do not need the BuckOhm™ Dielectric Hardware. Buckingham's TrueFit™ line of harnesses are the ONLY universal harness on the market and can fit sizes S-3X.



ASTM F887

Economy TrueFit™ w/Web Dorsal Loop U637F8Q1

Features include:

- Whether your 5' 1" and 130 lbs. or 6' 6" and 325 lbs., this harness will fit you.
- Unique adjustment features on both the front and back of the harness make this a perfect choice if you are looking for a universal harness.
- Hook and Loop chest strap.
- Web loop dorsal attachment.
- Steel friction buckles for harness adjustments.
- Quick connect leg strap buckles for easy donning.
- Harness comes w/energy absorbing lanyard breakaway attachment (ensure ANSI compliance if removing back pad) & leg strap retainers to use if needed.

Economy TrueFit™ w/Steel Dorsal D-Ring U637F8Q2

Features include:

- Whether your 5' 1" and 130 lbs. or 6' 6" and 325 lbs., this harness will fit you.
- Unique adjustment features on both the front and back of the harness make this a perfect choice if you are looking for a universal harness.
- Hook and Loop chest strap.
- Steel D-Ring dorsal attachment.
- Steel friction buckles for harness adjustments.
- Quick connect leg strap buckles for easy donning.
- Harness comes w/energy absorbing lanyard breakaway attachment (ensure ANSI compliance if removing back pad) & leg strap retainers to use if needed.



ASTM F887



ASTM F887

Economy TrueFit™ w/Backpad & Web Dorsal Loop U68D7FQ1

Features include:

- Whether your 5' 1" and 130 lbs. or 6' 6" and 325 lbs., this harness will fit you.
- Unique adjustment features on both the front and back of the harness make this a perfect choice if you are looking for a universal harness.
- Quick connect chest buckle.
- Steel friction buckles for harness adjustments.
- Web Loop dorsal attachment.
- Lightweight, comfortable and breathable back pad.
- Quick connect leg strap buckles for easy donning.
- Harness comes w/energy absorbing lanyard breakaway attachment (ensure ANSI compliance if removing back pad) & leg strap retainers to use if needed.

BUCK OHM™ TRUEFIT™

DIELECTRIC UNIVERSAL FIT HARNESSES

FEATURING 9KV RATED HARDWARE

The unique value of Buckingham's new BuckOhm™ TrueFit™ Harnesses, is that they truly are a universal harness. No one else on the market can say that. Competitors say they have a universal harness but its wildly out of adjustment, doesn't fit properly, and is unsafe to the end user. At best, our competitors can say "one size fits many," but Buckingham's unique design allows for these TrueFit™ harnesses to be the ONLY universal harness on the market. One size will fit anyone from a small up to a 3XL! Whether your 5' 1" and 130 lbs. or 6' 6" and 325 lbs., this harness will fit you. We haven't seen anyone that it won't fit, but we also haven't taken it to the carnival yet! Unique adjustment features both on the front and back of the harness make this a perfect choice if you are looking for a universal harness.



ASTM F887

BuckOhm™ TrueFit™ w/Pigtail U68L7NQ1

Features include:

- 9KV rated Dielectric hardware.
- Dielectric quick connect chest buckle.
- 18" Dorsal Pigtail w/9KV Dielectric D-Ring
- Lightweight back pad.
- Dielectric quick connect leg strap buckles for easy donning.
- Frontal rescue loops
- Dual trauma straps.
- Harness comes w/energy absorbing lanyard breakaway attachment (ensure ANSI compliance if removing back pad) & leg strap retainers to use if needed.
- Also available in BuckViz Safety Green; use Model **U68L7NQ4**

BuckOhm™ TrueFit™ w/Dielectric D-Ring U68L7NQ2

Features include:

- 9KV rated Dielectric hardware.
- Dielectric quick connect chest buckle.
- 9KV rated Dielectric dorsal D-Ring.
- Lightweight back pad.
- Dielectric quick connect leg strap buckles for easy donning.
- Frontal rescue loops
- Dual trauma straps.
- Harness comes w/energy absorbing lanyard breakaway attachment (ensure ANSI compliance if removing back pad) & leg strap retainers to use if needed
- Also available in BuckViz Safety Green; use Model **U68L7NQ5**



ASTM F887



ASTM F887

BuckOhm™ TrueFit™ w/Web Loop U68L7NQ3

Features include:

- 9KV rated Dielectric hardware.
- Dielectric quick connect chest buckle.
- Web loop dorsal attachment.
- Lightweight back pad.
- Dielectric quick connect leg strap buckles for easy donning.
- Frontal rescue loops
- Dual trauma straps.
- Harness comes w/energy absorbing lanyard breakaway attachment (ensure ANSI compliance if removing back pad) & leg strap retainers to use if needed.
- Also available in BuckViz Safety Green; use Model **U68L7NQ6**

HARNESSES
W/SIDE D-RINGS



**X-Style Harness
w/Pass Through Buckles
U601A3Q1**



The BLT Harness line was designed specifically for the use with Buckingham's BLT (Buck Ladder Tether) system for fall protection.

Features include:

- Universal size.
- X-Style configuration allows for easier movement when on ladder or in bucket.
- Nylon web loop dorsal attachment.
- Sternal D-Ring attachment for connection with the BLT's ANSI Z359.15 rated Buckingham Mobile Fall Arrester.
- Interlocking buckles.

*Rated to 420 lbs. when used with equivalently rated accessories.
Meets the ASTM F887 Electric Arc Performance Requirements.*

**X-Style Harness w/Quick
Connect Buckles
U601A8Q1**



The upgraded version of the popular BLT Harness featuring quick connect buckles instead of interlocking buckles for easier donning. The BLT harness line was designed specifically for use with Buckingham's BLT (Buck Ladder Tether) system for ladder fall protection.

Features include:

- Universal size.
- Quick Connect buckles for easy donning.
- X-Style configuration allows for easier movement when on ladder or in bucket.
- Nylon web loop dorsal attachment.
- Sternal D-Ring attachment for connection with the BLT's ANSI Z359.15 rated Buckingham Mobile Fall Arrester.
- Ideal for female users.

*Rated to 420 lbs. when used with equivalently rated accessories.
Meets the ASTM F887 Electric Arc Performance Requirements.*



**TrueFit™ X-Style Harness
w/Quick Connect Buckles,
Back Pad & Leg Pads
U601A8Q4**



The unique value of Buckingham's Economy TrueFit™ Harnesses, is that they truly are a universal harness. Now, we have designed these harnesses specifically for cable and telecom workers.

Features include:

- Lightweight, comfortable, breathable and most importantly, functional back pad.
- Back/Shoulder pad provides comfort and ease when donning.
- Dual trauma straps.
- Sternal D-Ring.
- Web loop at dorsal location.
- Positioning D-Ring.
- Quick Connect chest strap and leg straps for easy donning.
- Reflective material stitched to the front and back.



For A Complete
Offering of Full Body
Harnesses Visit
buckinghammfg.com





02 ENERGY ABSORBING LANYARDS / PFLs / SRLs

BUCKVIZ™ BUCKYARD™ W/ LOCKING SNAP & WEB LOOP

Ideal for users w/web dorsal loops on harness & who want a light/compact shock absorber.

6' models only - For users up to 420 lbs., add suffix X4. For Factor II Fall (up to 12' free fall) add suffix X12.

For a full body harness w/a dorsal web loop we recommend a corresponding nylon loop on one end of energy absorber with a 1706 locking snap hook on the other end. To order an energy absorber with locking snaps on both ends: 6': **8VV1D16S1**. Meets applicable OSHA, ASTM and ANSI Requirements



BuckYard™
6' : **84V1D16S1**



Goes well with Economy TrueFit™ Harnesses on page 4

BUCKVIZ™ BUCKYARD™ W/2 LOCKING SNAPS

Ideal for users w/steel dorsal D-Ring on harness & who want a light/compact shock absorber.

6' models only - For users up to 420 lbs., add suffix X4. For Factor II Fall (up to 12' free fall) add suffix X12.

For a full body harness w/steel D-Ring dorsal attachment we recommend a corresponding energy absorber with 1706 locking snap hooks on both ends. To order an energy absorber with locking snap on one end and web loop on the other end: 6': **84V1D16S1**. Meets applicable OSHA, ASTM and ANSI Requirements



BuckYard™
6' : **8VV1D16S1**



Goes well with Economy TrueFit™ Harnesses on page 4

BUCK ΩHM™

DIELECTRIC LANYARDS

Goes well with BuckOhm™ TrueFit™ Dielectric Universal Fit Harnesses on page 5.

Buckingham's new BuckOhm™ line is designed with all dielectric hardware. Dielectric hardware eliminates the potential of static electricity being transferred through steel hardware if working around an energized conductor in wet or damp conditions. Also, Dielectric hardware has a better resistance to corrosion in extreme conditions (hot/humid or salty air environments).

For users up to 420 lbs., add suffix X4. For Factor II Fall (up to 12' free fall) add suffix X12. Meets ASTM F887 Arc Flash Requirements & ANSI Z359.



BuckOhm™
BuckYard
84+G1D16S1



Features Include:

- Dielectric locking snap hook on one end and web loop on the other end
- Web loop can be hitched to a dielectric or steel D-Ring. Dielectric snaps can be attached to a web loop (with wear guard), dielectric or steel D-Ring
- Interior materials stretch to reduce the arresting force to less than 900 lbs.



BuckOhm™
BuckYard
8+G+G1D16S1



Features Include:

- Dielectric locking snap hook on both ends.
- Web loop can be hitched to a dielectric or steel D-Ring. Dielectric snaps can be attached to a web loop (with wear guard), dielectric or steel D-Ring.
- Interior materials stretch to reduce the arresting force to less than 900 lbs.



BuckOhm™
BuckYard Stretch
8+G+G7D16S1



Features Include:

- Dielectric locking snap hooks on both ends.
- Web loop can be hitched to a dielectric or steel D-Ring. Dielectric snaps can be attached to a web loop (with wear guard), dielectric or steel D-Ring.
- Interior materials stretch to reduce the arresting force to less than 900 lbs.

BUCK
COMBOYARD™



Meets ASTM
F887 Electric
Arc Performance
Requirements.

The ComboYard™ combines the best features of various lanyards on the market and can accommodate any size angle iron. Features a 5' dual tie-back lanyard with wear guard and a 12' fall (Force Factor II) ANSI rated shock absorber and rescue loops for quick, easy and safe rescue. Includes Tie Back Snaps with 5,000 lb.

rated gate, two ANSI 3,600 lb. gate Big BuckSnaps™ that attach around angle iron up to 4". Meets OSHA 1926.954, ANSI Z359.13-09 and ASTM F887-13 Arc Flash Requirements.



V Style Energy
Absorbing Lanyard
8V6716D+4S1X12

Lanyard with an elastic core, minimizing length while relaxed. Features two 12' fall (force factor II) energy-absorbing legs. 6' overall length. Double locking pelican hooks that have a 2 1/2" gate opening. Meets/exceeds ANSI Z359.13, ASTM F887 and OSHA electric arc performance requirements.



ASTM F887

HOW TO



BUCKLIMITER™

For A Complete Offering of PFLs & SRLs Visit our website: buckinghammfg.com



The all-aluminum BuckLimiter™ retractable features a braking system that is designed for smooth and consistent operation while eliminating that jerky feeling or lock-ups. The BuckLimiter™ is accompanied with 3,600 lb. gate rated hardware

and a tangle-free swivel top that increases overall mobility when working. Available in either Kevlar webbing or Dyneema polymer fiber webbing. Rated to 350 lbs., with an option for a 420 lb. rated unit. Meets ANSI Z359.12.



Mini BuckLimiter™ 6009K-64AA
6' Extension
Rated: 310 lbs.
Weighs 2 lbs.



Mini BuckLimiter™ 6009K-64A+R
6' Extension
Rated: 310 lbs.
Weighs 2 lbs.



BuckLimiter™ 6008KQ10
7' Extension
Rated: 420 lbs.
Weighs 4 lbs.



Tie Back BuckLimiter™ 6008Q7
7' Extension
Rated: 350 lbs.
Weighs 3.2 lbs.



Mini BuckLimiter™ 6009-64AA
6' Extension
Rated: 420 lbs.
Weighs 2 lbs.



BuckLimiter™ 6008-74AA
7' Extension
Rated: 350 lbs.
Weighs 4 lbs.



BuckLimiter™ 6008K-74AA
6' Extension
Rated: 310 lbs.
Weighs 4 lbs.



BuckLimiter™ 6008-74D+4
7' Extension
Rated: 350 lbs.
Weighs 4 lbs.



Lightweight Retractable 6007-164DV
16' Extension
Rated: 350 lbs.
Weighs 4.6 lbs.



Lightweight Retractable 6007-164AA
20' Extension
Rated: 310 lbs.
Weighs 6.2 lbs.

The Dual TieBack BuckLimiter™ allows users to be 100% fall protected while climbing, traversing, or descending steel structures. The unique feature of this product allows the user to unhook one leg and move freely to a second anchorage while remaining 100% fall protected. Can be used in a single or double configuration.

KIT159 INCLUDES:

- Two **6008Q7** BuckLimiters™
- One **220279C** clip.



Using Dual TieBack BuckLimiter™ with the BuckArticulator™ harness.




Close up of tie-back snap with wear guard.

Swivels with workers position!



Dual TieBack BuckLimiter™ Kit KIT159

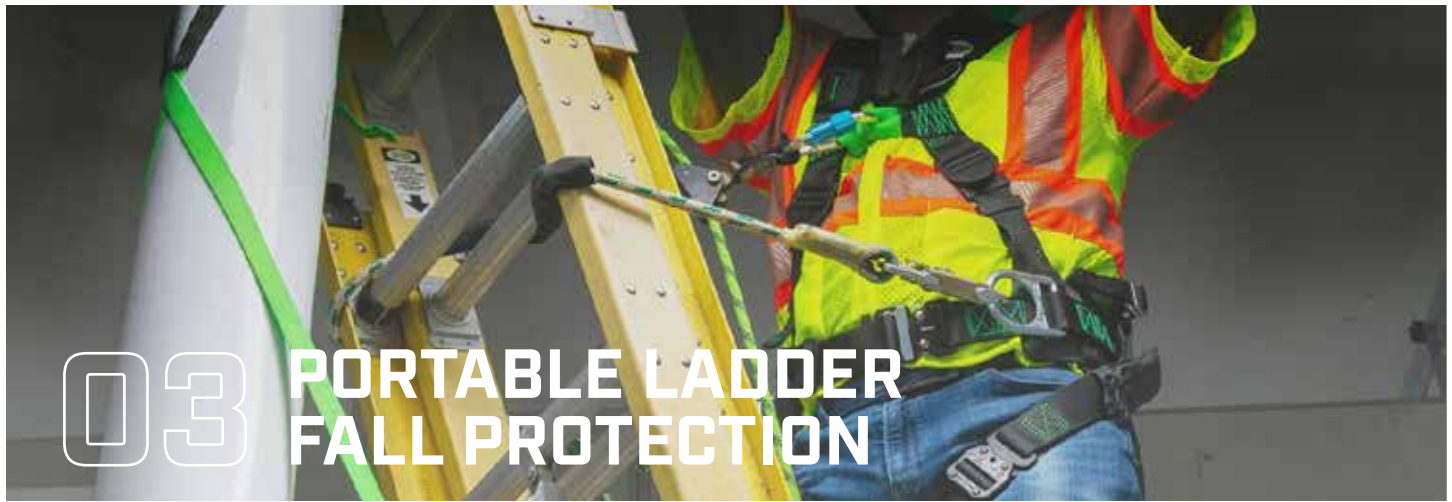


03 PORTABLE LADDER FALL PROTECTION

BUCK LADDER TETHER

See the NEW BLT video:
[BuckinghamMFG.com/
videos](http://BuckinghamMFG.com/videos)

Buckingham Manufacturing is proud to announce the Buck Ladder Tether. The BLT is a ladder mounted lifeline system which allows 100% fall protection for the user while ascending or descending a ladder. The BLT utilizes a specially designed Ladder Lashing System to secure the ladder from the ground, to the structure from which you will be working on. The Ladder FP Anchor Strap attaches to the top of the ladder securing the lifeline to the ladder. Assembled onto the lifeline is the **Patent Pending** ANSI Z359.15


rated BuckArrester™ system that connects to the users harness and allows them to ascend & descend the ladder while remaining 100% fall protected. In the event of a fall from the ladder, the BuckArrester™ will arrest the fall while the Ladder Lock System keeps the ladder secured to the structure. The BLT must be used with the sternal attachment point of an ANSI Z359.11 compliant full-body harness. BLT can be used on a pole or on a steel lattice.

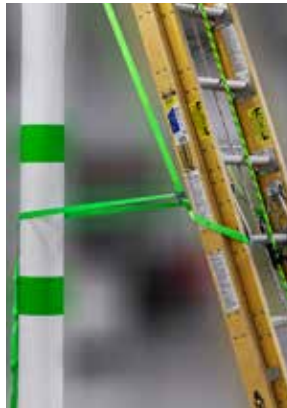

Lower Attachment



Upper Attachment

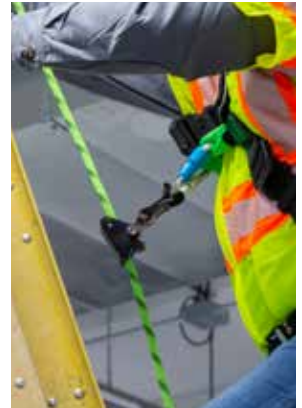

Mobile Fall Arrester/Lifeline

**Buck Ladder Tether
(BLT)
128R**

GOES WELL WITH:




**BLT Harness w/Quick
Connect Buckles
U601A8Q1**

or




**BLT Harness
w/BuckStep™ 2.0
U601A8Q3**

or



**BLT Harness w/Work
Positioning D-Rings
U601A3Q1**

THE BLT LADDER SET UP

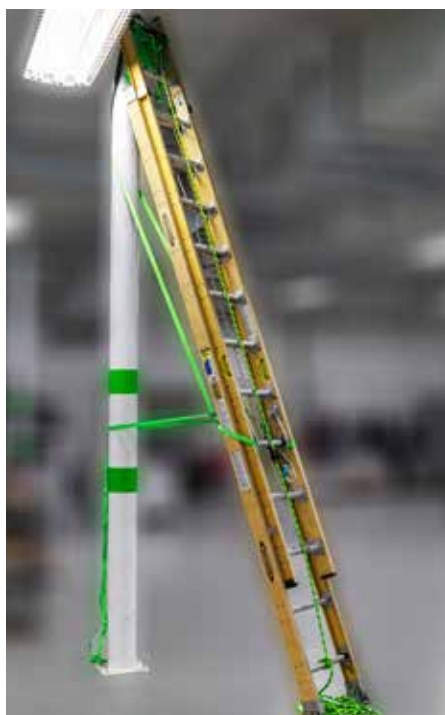

THE BLT ON STEEL LATTICE



1. Once ladder is in place, use telopole to lift BLT straps over lattice.



2. Pull straps down using telopole.



3. Cross straps.



4. Attach straps to rails on ladder.



5. Attach carabiner of mobile fall arrester to sternal D-Ring on harness.



6. Climb ladder using company work practices.

LADDER LOCK SYSTEM

Goes great with the BLT!

Ladders and rounded poles are potentially dangerous combinations. Buckingham offers a safety solution that includes ladder safety straps that can be stored/enclosed in tough storage bags that

attached to your ladder for easy access. No more forgetting the safety straps in the vehicle or the garage. The straps are ready for deployment when the ladder goes up.



Buck Ladder Lock System (Bottom & Top) 355BT



Buck Ladder Lock System (Top) 355T



Buck Ladder Lock System (Bottom) 355BG9



INCLUDES

- Each system comes with the complete ladder lock system, Top and Bottom bags with Straps.
- Prevents Kick out and excessive rocking
- Designed for Poles and Trees
- Bags do not interfere with climbing space
- Doesn't interfere with ladder storage
- Highly visible brightly colored bags to remind technicians of deployment.
- Quick Access to Straps
- Weather resistant storage bags



2-D TrueFit™ Belt 1998C

Patent-pending, fully adjustable, 2-D Truefit™ belt that allows your dee size to be to be adjusted between sizes 20-30. Offers an adjustable dee piece/gut strap that allows the user to customize the size of the belt at any given moment.

- Can be retrofitted directly to any 'H' or 'X' style full-body harness.
- Quick connect belt strap buckle for quick and easier donning.
- Steel D-Rings.
- Lightweight, just 2.5 lbs.!
- A narrow back pad measuring 4 1/4" wide.
- The back pad features 2 layer of Arc Tested material that is constructed with hook and loop connecting material that aids in the dee size adjustment.



Ladder Belt 38523Q12

This Buck Ladder Belt provides all the features of a traditional body belt but in a smaller version designed for mobility on a ladder.



BuckAdjuster™ w/All Aluminum Components 9A4+R-8

Aluminum snap hook and a triple-locking carabiner that meets applicable ANSI, OSHA and ASTM standards.



LADDER FALL PROTECTION KITS



BuckHook™ Ladder Fall Protection Kit KIT9-20

Use with a portable ladder or when climbing steel lattices to ensure 100% fall protection when ascending and descending.

The BuckHook™ system is ideal for portable ladder fall protection from the ground. The system uses a shepherd's hook attached to a fiberglass pole with a lifeline. Simply attach a fall arrester to the lifeline and the lifeline to a sternal or dorsal harness attachment and you are 100% fall protected from ground to ground. Use with a portable ladder or when climbing steel lattices to ensure 100% fall protection when ascending or descending.

INCLUDES:

- One **50371U** BuckHook™.
- One **5004L4** mobile fall arrester with triple action carabiner.
- One **5005** auto lock steel carabiner w/3,600 lb. rated gate keeper.
- One **39S2Q2-20** 7/16" - 1/2" semi static Kernmantle 16' Lifeline.
- One **45400R2-18** 18" utility bag.



BuckHook™ Ladder Fall Protection Kit w/SRL KIT158-16

Use with a portable ladder or when climbing steel lattices to ensure 100% fall protection when ascending and descending.

This BuckHook™ System is very similar to KIT9-20, except it utilizes a 16' self retracting lifeline.

INCLUDES:

- One **50371U** BuckHook™.
- One **6007-164DV** 16' lightweight BuckLimiter™ Retractable Lanyard.
- One **45400B4-18** 18" equipment bag.



16' Telescopic Hot Stick 491133

- 16' Telescopic Hot Stick
- Universal Head Attachment
- Used to connect BuckHook™ or BLT for Ladder Fall Protection Systems



CONFINED SPACE RESCUE KIT

See the video:
[BuckinghamMFG.com/
videos](http://BuckinghamMFG.com/videos)

These unique systems allow for a rescue to be accomplished without having to send additional personnel into the hazardous area. Entrant suited with a full body harness (model **603S8Q211**) enters the confined space with or without being tethered.

For non tethered rescue, the attendant/rescuer uses the rescue line system (**39SAM13Q9-30**). The rescue line equipped with a carabiner is attached to a 16' telescopic pole via the telescopic pole adapter (model **40**). The adapter releases the carabiner once the rescuer locates one of four reflective rescue loops, "hooks" into a loop and pulls back on the pole. The rescue line is then tied on to the winch and the rescuer then proceeds to raise the victim.

For a tethered rescue, the attendant/rescuer uses the rescue line system (**39SAM13Q3-30**). Entrant enters the confined space with a lifeline (**39SAM13Q1**) attached. The lifeline is attached to the manhole guard/rescue winch with a specially designed breakaway assembly. This device will release upon impact such as that of a vehicle which has entered the work zone and strikes the manhole guard. For rescue, the attendant/rescuer attaches the ascender to the winch line and proceeds to raise the victim.



Non-Tethered Confined Space Rescue Kit
105Q2-30

INCLUDES:

- One manhole guard.
- One winch.
- One 16' telescopic fiberglass pole.
- One **39SAM13Q9-30** Rescue Line Kit (Two 30' lifelines, model **40** telescopic pole adapter & rope bag).



Tethered Confined Space Rescue Kit
105Q1-30

INCLUDES:

- One manhole guard.
- One winch.
- One **39SAM13Q3-30** Rescue Line Kit (One 30' lifeline with ascender, breakaway assembly & rope bag).

Non-Tethered Rescue:



Tethered Rescue:





Tripod for
Confined
Space
Retrieval
System
5003

When entering a confined space, a worker must be attached to an independent lifeline for adequate fall protection and retrieval. Buckingham's retrieval systems exceed all

current OSHA and ANSI requirements. Read and follow the users manual enclosed with every system.

A COMPLETE RETRIEVAL SYSTEM SHOULD INCLUDE:

- A man rated winch to be attached to personnel at all times during the descent and work below grade
- Tripod (5003)
- Full Body Harnesses (See Harness Section)
- Work Winch to raise and lower materials only (5000) (5010)

Tripod, man rated winch and work winch are purchased separately



**BuckOhm™ Confined Space Harness
68M9EQ2**

Features Include:

- 9KV dielectric hardware. *Chest D-Ring rated at 3KV.
- Lightweight, comfortable, breathable and most importantly, functional back pad.
- Web loops at the dorsal location.
- Quick Connect legs straps for easy donning.
- 5 Reflective web loops.
- Back/shoulder pad provides comfort and ease when donning.



**The BuckTrievers™
603S8Q211**

Features Include:

- Web Loop at sternum.
- Quick Connect legs straps for easy donning.
- 3 reflective retrieval loops and 2 reflective loops at hips.
- Padded leg and shoulder straps.
- Use in conjunction with Buck's Manhole rescue lifeline kits and Confined space retrieval systems.



**The Economy 'H' Style
BuckTrievers™
63936Q**

Features Include:


- Hook & loop chest strap.
- Pigtail dorsal attachment.
- Quick Connect legs straps for easy donning.
- 3 reflective retrieval loops and 2 reflective loops at hips.
- Use in conjunction with Buck's Manhole rescue lifeline kits and Confined space retrieval systems.
- Lanyard parking attachment.



**Confined Space Rescue Strap
82**

Features Include:

- Keeps the victim in an upright position.
- Easily donned by the rescuer or victim to facilitate rescue.
- Three different loops for half hitching strap around the victim.
- Straps that go around the victims legs to prevent slip through.
- Two loops at each end of the strap used for raising the victim.





TEMPORARY
ANCHORS



**Temporary Anchor
3901**

Create a temporary anchor point by half-hitching around a suitable structure. Available in any length; (e.g. for 4' use model number **3901-4**). Rated to 5,000 lbs.



**Temporary Anchor
3902**

Small Dee to pass through a larger Dee making a secure anchor. Available in any length; (e.g. for 4' use model number **3902-4**). Rated to 5,000 lbs.

LIGHTWEIGHT
SUSPENSION SLING



**Lightweight
Suspension Sling
39021J12-3**

For use as a personal anchor for human support. Can be choked or basket hitched. Comes w/wear protector for wrapping around sharp objects & increases the life of sling.



WIRE SLING



**Wire Sling
3909-3**
3/8" eye to eye wire sling.




06 TOOL STORAGE

BUCK TOOL TETHERS

Dropping tools at height is serious, save yourself the worry of dropping a tool with the Buck Tool Tether lanyard that keeps your tools secured and close to you. Expands smoothly with the user's reach to reduce fatigue and contracts easily to the original length when not in use. Helps workers prevent injury, damage, and lost productivity from dropped tools. **NOT for fall arrest.**

Features:

- Stretch cord surrounded by tubular nylon webbing
- Lock stitching at both ends for extra security
- Twist locking aluminum carabiner
- Adjustable tool loop
- Length: 38 in – 51 in.
- Helps prevent injuries to workers below due to dropped tools.
- Conforms to ANSI/ISEA 121-2018

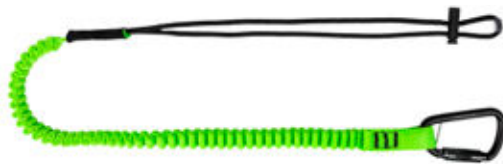

**Buck Tool Tether
600071**

Maximum safe working capacity: 15 lbs.



**Buck Tool Tether
60007**


Maximum safe working capacity: 35 lbs.

BUCKET HOOK W/TETHER HOLE

The newly designed bucket hook can fit up to a 2 1/2" bucket lip and now features a tool tether connection eye. The tether connection eye allows for the Buck Tool Tether **600071** to be attached for extra tool fall protection.

Features:


- An outside hook with a 2 1/2" hook opening.
- 40 lb. WLL (3:1 safety factor).
- 2 inside accessory hooks w/30 lb. WLL.
- 3/4" inside opening.



**Bucket Hook
w/Tether Hole
2410**



**Bucket Hook w/Tether
Hole & Tool Tether
2410T**



**Bucket Hook
w/Tether Hole & Gate
2410G**



**Bucket Hook w/Tether
Hole, Gate & Tool Tether
2410GT**

HANDLINE CARRIERS



Heavy Duty Gated Handline Carrier 2402GH
 Designed to breakaway when approximately 33 lbs. of pressure is applied. The gate closed breakaway strength increases by 10 lbs.



Gated Handline Carrier 2402G
 Gate keeps handline or tools securely stored while climbing or working. Straightens when approx. 25 lbs. pressure applied, allowing the handline to pull free.



BuckCarrier™ Chainsaw Carrier 2402B
 The lowest profile chainsaw hook on the market, its compact design makes it nearly impossible to get caught on limbs and branches like other chainsaw carriers. WLL is 15 lbs. Fits most popular saddles currently on the market.

TOOL APRONS



Aerial Basket Tool Apron 4500YG9

A heavy vinyl aerial basket tool apron with sewn-in pockets through two layers of vinyl coated nylon. Three large 3/4" grommets reinforced with PVC rods that suspends the apron from the bucket using Buckingham PVC or polymer hooks. Has a sewn in stiffener and 2 pocket holsters, a hammer loop. Features 2 nut and bolt bags, 11 socket pockets and 2 PVC pipe inserts for auger bit holders. Hooks are not included.



13 Pocket Hi-Vis Tool Apron w/Hot Stick Holder 4500YG9M2P8

A heavy vinyl aerial basket tool apron has sewn in pockets through two layers of vinyl coated nylon. Features:

- Three large 3/4" grommets reinforced with PVC rods that suspends the apron from the bucket using Buckingham PVC or polymer hooks.
- Leather knife pouch with snap for hanging your knife.
- 8" magnetic strip that allows the lineman to store loose hardware and easily access it when required.
- Has a sewn in stiffener and 2 pockets holsters.
- Hammer loop.
- Features 2 nut and bolt bags.
- 11 socket pockets.
- 1 PVC pipe insert for auger bits.
- 1 Hot Stick Holder.

TOOL TRAYS



Tool Tray w/Divider 45091

A fiberglass tool tray equipped with a polyethylene divider that was designed to hang off the lip of an aerial bucket that features a built-in bumper that will keep the tray level. Built on hanger fits a 2 5/8" basket lip with reinforced lip around the tray. Features:

- Constructed from durable 3/8" thick high-density polyethylene
- 11 storage compartments for various tool storage.
- 18 socket pockets
- 9 Small - 5/16" diameter
- 9 Large - 9/16" diameter



BUCK
BIG MOUTH BAG

NEW

The Buck Big Mouth Bag is a new and improved equipment bag with an extended wide mouth (15 1/2" x 22") to make it easier and faster for workers to store all of their PPE, gear, tools, and other items in their bag with ease. No more struggling to get your essentials into your bag and no more fighting to get it closed. To order with wheels, add **W1** to P/N.



Buck Big Mouth Bag

Standard Bag



**Buck Big Mouth Bag
(Safety Green)**
47333G9R5S



**Buck Big Mouth Bag
(Black)**
47333B3R5S

Lockable option w/two lock holes at left and right of bag closure for pad lock or cable lock available. Use P/N's **47333G9L3R5S/47333B3L3R5S**

***Pad lock shackle must have height greater than 1 1/4".*



15" (bottom), 18" (top)

**The BuckPack™
4470G9**



24"

22"

**Big BuckPack™
4471B3**

**BuckPack™ & Big BuckPack™
Equipment Backpacks**

Various models, sizes, colors and patterns also available.

The BuckPack™ & Big BuckPack™ Equipment Backpacks are large enough to carry all the equipment of a traditional tool bag. All pockets have hook and loop closures.

Features padded shoulder straps with adjustable chest strap. Zipped raw flap is designed to keep water out of bag. Carry handles located at the top of bag.



**Buck Mini
Equipment Bag
506G4P7-14**

Bucks mini equipment/tool bag now featured in a high-vis color fits all your smaller equipment and tools with ease.

- Constructed of a heavy Cordura nylon for maximum durability
- Heavy duty zipper closure
- Strong 1" nylon web carry handles
- 2 outside pockets for extra storage with heavy duty closure snaps
- Measures 10" H x 7" W.



**Oval Bucket
121615CH1L**

- Hard canvas body with molded top rings and nylon web handles.
- Has 14 outside tool pockets and 15 inside pockets.
- Bucket hooks not included.
- Measures 14" L x 6 1/2" W x 10" H



**Small Tool Bag
506**

Bucks mini equipment/tool bag fits all your smaller equipment and tools with ease.

- Constructed of a heavy canvas for maximum durability.
- Heavy duty zipper closure.
- Strong 1" nylon web carry handles.
- Measures 10" H x 7" W x 10" D.



**Canvas Bucket
12162**

Heavy canvas bucket that features 15 inside tool pockets and 2 polypropylene ropes connected to a heavy snap for suspension. Molded top rings. Heavy durable thread that will not rot. Measures 10.5" x 7".



**Canvas Bucket
1215G9**

Canvas bucket made with heavy canvas construction with a solid continuous PVC ring in top and has a molded rubber bottom. A polypropylene rope with 4958 brass swivel snap. Features an 8" x 8" pocket.



**BuckViz™ Buckingham Mesh Equipment Bag
45400G10**

The popular Buckingham mesh equipment bag has a new look. Now available in Hi-Vis Green comes in a variety of different sizes for every piece of equipment from small tools and hardware to saddles, rope and climbers our mesh bags can hold it. Buckingham's mesh bag makes it easy to locate items within the bag while allowing airflow pass through to keep things from smelling after a day in the field. Airflow allows for equipment to dry while being stowed. Extremely lightweight. Easily find equipment in your bag without digging everything out.

Suffix:	-9	-12	-18	-24	-30
Measures:	5" dia. x 9" L	9.5" dia. x 12" L	9.5" dia. x 18" L	9.5" dia. x 24" L	9.5" dia. x 30" L

08 POUCHES & HOLSTERS



**Installers Pouch
5041**
Features 4 pockets with 5 tunnel loops. Also features several miscellaneous inside pockets. Measures 9.25" H x 5.5" W.



**Miscellaneous
Holster
4164**
Features 8 pockets. Measures 10" x 7".



**Electricians
Pouch
4659**
Features 9 pockets. Also features a hammer loop and a tape thong. Measures 11" x 9.5"



**Miscellaneous
Holster
4650**
Constructed of durable leather and features 5 pockets to holster tools and an accessory knife snap. Easily attachable to a belt. Measures 10" H x 8.25" W.



**Knife Sheath
4079**
Measures 9.5" x 3". Easily attachable to a belt with accessible belt loops.



**Miscellaneous
Holster
4023**
Features 3 pockets. Measures 11.25" H x 6.25" W.



**Ballistic Nylon
Holster
949C**
Features 15 pockets to efficiently organize tools. Shown are tools used by telephone technicians (tools not included with holster). Has a two inch tunnel in the back to pass a belt through.



**Nut & Bolt Bag
4570B2M2**
Made from quality heavy Canvas. Designed for easy excess to small hardware while in or off the field. Lightweight and easy to attach and detach from body belts or any other form of carry with our snap and D-ring connection. Features a magnet, reinforced top and drain holes Available without a magnet model **4570**.



**Trouser Belt
6282**
Leather belt featuring stitched edges, a belt end keeper, and a single prong silver-tone buckle that provides a secure fit. Available sizes: 32, 34, 36, 38, 40, 42, 44 and 46.



11 KNIVES & TOOLS



Buck High Visibility Ergoblade™ 7091G

Ergonomic round handle makes for easy handling.

This safety green ErgoBlade™ has a rubber handle that was ergonomically designed to fit comfortably in your gloved hand. The ergonomic handle also helps create the perfect cutting angle without the hassle of constantly and repetitively rotating the wrist. Specifically designed to eliminate the high force needed to skin cable. Available in black by ordering model **7091**.



Skinning Knife w/Yellow Handle 7086

A molded plastic handled knife that measures 8" length with an accessory ring.



Skinning Knife w/Red Handle 7089

A molded plastic handled knife that measures 8 ½" length with an accessory ring.



Thread Restorer 6103

Has an outside diameter capacity of ¼" to 1". Diameter clearance required 14 ½" - 17". 7" long with a 3" handle. Weighs 1 lb.



Thread Restorer 6203

Features an outside diameter capacity of ¼" to 1". Has a maximum handle swing of 3" of work in closely confined places. For such applications as cylinder head studs, 'U' bolts, wheel lugs, etc. Weighs 1 ¼ lbs.



Knife Pouch 7058CK


A pouch that consists of a 7088 knife and the 7085 scissor. Features two pockets. Measures 7.5" L x 2" W.



Knife Kit 7058L

A pouch kit that includes one **7058S** pouch and one **7088** knife. Features belt loops and 1 pocket. Measures 2" W x 7 ½" L.

12 WARNING FLAGS

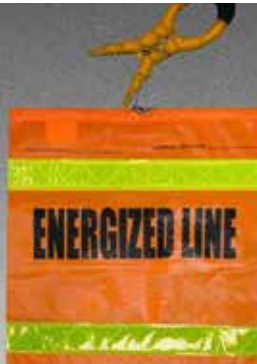

RFP Warning Flag 8452G9VQ1
Hi-Visibility green RFP warning flag with two reflective strips for easy visibility when working at night. Hook and loop strap for a secure attachment. Features a 6.5" x 6.5" clear vinyl pocket on backside for crew, truck or company information. PVC stiffener on top.



Clearance Point Flag 8451G7P5VQ2
Hi-visibility green Clearance Point flag with two reflective strips for easy visibility when working at night. Hook and loop strap for a secure attachment. A 6.5" x 6.5" clear vinyl pocket on backside for crew, truck or company information. PVC stiffener on top. Measures 18" H x 19.5" W.



Danger Flag 8451G7P5V
Hi-visibility green DANGER flag with two reflective strips for easy visibility when working at night. Hook and loop strap for a secure attachment. A 6.5" x 6.5" clear vinyl pocket on backside for crew, truck or company information. PVC stiffener on top. Measures 18" H x 16.5" W.



Energized Line Flag w/Clamp 8456HO3
Hi-visibility orange "Energized Line" flag with two reflective strips on front and back for easy visibility when working at night. The hot line clamp is included. Includes truck/radio # and service location lettering along the top. Measures 16" H x 20" W.



Danger Red Flag 8457R3
Hi-visibility red danger flag with two reflective strips on front and back for easy visibility when working at night. Hook and loop straps for a secure attachment. Includes truck/radio # and service location lettering along the top. Measures 18" H x 19.5" W.



Do Not Energize Flag 8454O3VQ3
Hi-visibility orange Do Not Energize flag with two reflective strips on front and back for easy visibility when working at night. Hook and loop straps for a secure attachment. Wire attachment for hot line clamp on top and PVC stiffener on bottom. Includes truck/radio # and service location lettering along the top. Measures 16" H x 20" W.



Grounds Flag w/Clamp 8454HO3
Hi-visibility orange or green "Grounds" flag with two reflective strips on front and back for easy visibility when working at night. Hook and loop straps for a secure attachment. Wire attachment for hot line clamp on top and PVC stiffener on bottom. Includes truck/radio # and service location lettering along the top. Measures 16" H x 20" W.




Grounds Flag 8454O3V
Hi-visibility orange with two reflective strips on front and back for easy visibility when working at night. Hook and loop straps for a secure attachment. Wire attachment for hot line clamp on top and PVC stiffener on bottom. Includes truck/radio # and service location lettering along the top. Measures 18.5" H x 16.5" W.

FOR OUR COMPLETE PRODUCT LINE


VISIT BUCKINGHAMMFG.COM

FOR MORE CATALOGS



EQUIPMENT & TOOLS FOR FALL PROTECTION

PN: 490323



TOOLS & FALL PROTECTION FOR LINEMEN

PN: 492026



LADDER & ROOFTOP FALL PROTECTION

PN: 492049



BAGS, BUCKETS & BOARDS FOR GEAR, TOOLS & EQUIPMENT

PN: 492045



OX BLOCK™ & RIGGING ACCESSORIES

PN: 492028

ALL PRODUCTS AVAILABLE FOR PURCHASE AT BUCKINGHAMMFG.COM

WARNING: Cancer and Reproductive Harm For All Products on Page – www.P65Warnings.ca.gov



VISIT BUCKINGHAMMFG.COM/VIDEOS



TRAINING - Ox Block Lift & Lower
([DOWNLOAD](#))



TRAINING - Ox Block™ Pole Top Rescue
([DOWNLOAD](#))



TRAINING - The Ox Hook
([DOWNLOAD](#))



TRAINING - Tower Rescue Training
([DOWNLOAD](#))



TRAINING - Ox Block™
([DOWNLOAD](#))



TRAINING - Progress Capture
([DOWNLOAD](#))

ALL PRODUCTS AVAILABLE FOR PURCHASE AT BUCKINGHAMMFG.COM

 **WARNING:** Cancer and Reproductive Harm For All Products on Page – www.P65Warnings.ca.gov

BUCKINGHAM
BUCK
1896