


# EZ SQUEEZE™ W/TOUGH ROPE

TREBLEKERN TOUGH ROPE IS NEARLY INDESTRUCTIBLE.

No more wear guard. No more jamming of your wear guard from traditional EZ Squeezes.

Buckingham's new wear-resistant Tough Rope is constructed with an energy absorbing nylon core, red braided polyester inner core cover (red wear indicator) and an abrasion and heat resistant Technora outer jacket that eliminates the need for a wear guard.

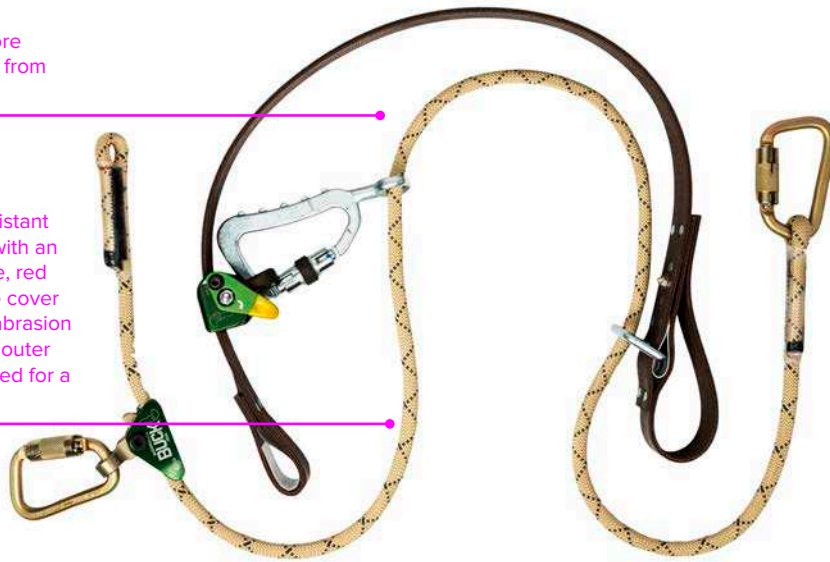

**Buck Cam Eye Gauge 6307**  
New Buck Cam Eye Gauge allows users to easily inspect the cam eye on your BuckGrab or WebGrab.

## EZ Squeeze™ w/Tough Rope 490K

Offers superb Wood Pole Fall Restriction capabilities and easy one-handed outer strap adjustment through use of Buckingham's patent pending WebGrab™ with the New BuckHorn Adjustment Lever. This allows EZ length adjustment of the outer strap eliminating users' need to remove their weight from the device. Just a flick of the wrist adjusts the strap in, and tapping the BuckHorn™ adjusts out.

- Buckingham's new wear-resistant Tough Rope is constructed with an energy absorbing nylon core, red braided polyester inner core cover (red wear indicator) and an abrasion and heat resistant Technora outer jacket that eliminates the need for a wear guard. No more jamming of your wear guard!
- The New EZ Squeeze™ also features a New Loop Handle on the outer strap that provides a more ergonomic position for the user's hands while ascending or descending.
- Through use of the BuckGrab™, the EZ Squeeze™ features easy one handed adjustment of the inner rope strap, and based on user's preference, can easily be configured to use a rope or web strap.
- One disconnect point when climbing over an obstruction.
- Easily used by right or left handed users.
- Red warning center within straps to facilitate visual inspection for excessive wear.
- 3600 lbf. gate rated hardware.
- Its modular design makes it easy to change out worn or damaged components or straps in the field.
- Buckhorn (TM) can be installed on opposite side of the web grab to accommodate both right and left-handed users.

Because of its numerous available configurations, the EZ Squeeze™ fits many climbing styles and needs. This unit is rated for a 350 lb. user when fully equipped and is manufactured, tested and inspected to meet the applicable requirements of the ASTM F887 standard.

*Interested in Tough Rope on other EZ Squeeze models? Call customer service at 1-800-YES-BUCK to build Tough Rope into another EZ Squeeze.*



BUCKINGHAM  
**BUCK**  
1896

BuckinghamMFG.com