

# OX BLOCK BUCKINGHAM





BUCKINGHAM  
**BUCK**  
1896

**BUCKINGHAM MFG** has proudly served industries with workers who climb wood poles, trees, towers and substation structures that support electricity, cable and telecommunications equipment for over 122 years. Whether for work above or below ground in these industries, we produce personal protection equipment and specialty tools for work positioning, retrieval, fall restraint, fall arrest and suspension work applications.

Most people do not think about the importance of work performed by those in this industry every day until the power goes out, the TV and computer stop working or a tree falls on a house or power line. Our customers maintain and restore services in all types of weather. This catalog is a tribute to these highly trained workers performing dangerous jobs with little recognition.

---

Buckingham MFG  
1-11 Travis Avenue  
Binghamton, NY 13904, USA

+1 800 937 2825

[buckinghammfg.com](http://buckinghammfg.com)

[sales@buckinghammfg.com](mailto:sales@buckinghammfg.com)

[facebook.com/buckinghammfg](https://facebook.com/buckinghammfg)  
[instagram.com/buckingham\\_mfg](https://instagram.com/buckingham_mfg)  
[twitter.com/buckingham\\_mfg](https://twitter.com/buckingham_mfg)  
[youtube.com/buckmfg](https://youtube.com/buckmfg)  
[google.com/+buckinghammfg](https://google.com/+buckinghammfg)

---



# CONTENTS

*This mini catalog is a sampling of the thousands of products we manufacture.  
For our full line, please visit [BuckinghamMFG.com](http://BuckinghamMFG.com)*

- 04** GREATER CONTROL
- 06** SPECS
- 08** ADDITIONAL CONFIGURATIONS
- 10** CONFIGURATIONS
- 11** OX BLOCK™ IN ACTION
- 12** BUCK BLOCKS
- 13** KITS
- 15** OX BLOCK™ W/BECKIES
- 15** HANDLINE ASSEMBLIES

---

# HANDLE LOADS WITH GREATER CONTROL

The patented **OX BLOCK™** is a rope snatch block that features an integrated friction bar that can be used for hurtman rescue, lowering loads, snubbing loads, and raising heavy loads. It allows the rigging professional to handle loads with greater control. When lowering loads

force is transferred from the worker to the **OX BLOCK™**. The **OX BLOCK™**, with greater working load limits, is designed to replace standard handline blocks, parted blocks and various snatch blocks.

## STANDARDS MET:

ASME B30 & CSA





**OX BLOCK™**  
**w/Swivel Eye**  
*(patented)*  
**50061**  
**50061Q1 (CSA)**



**OX BLOCK™**  
**w/Clevis Top**  
*(patented)*  
**50062**  
**50062Q1 (CSA)**



**OX BLOCK™ Clevis Top**  
**w/Buck Pin**  
*Removable pin for easy  
configuration change-outs!*  
**50063**



# DESIGNED TO


SWIVEL EYE

WLL Eye to Sheave:  
2500lbs


SWIVEL SIDE PLATE

INTEGRATED  
FRICTION BAR

WLL Eye to Friction Bar:  
1500lbs

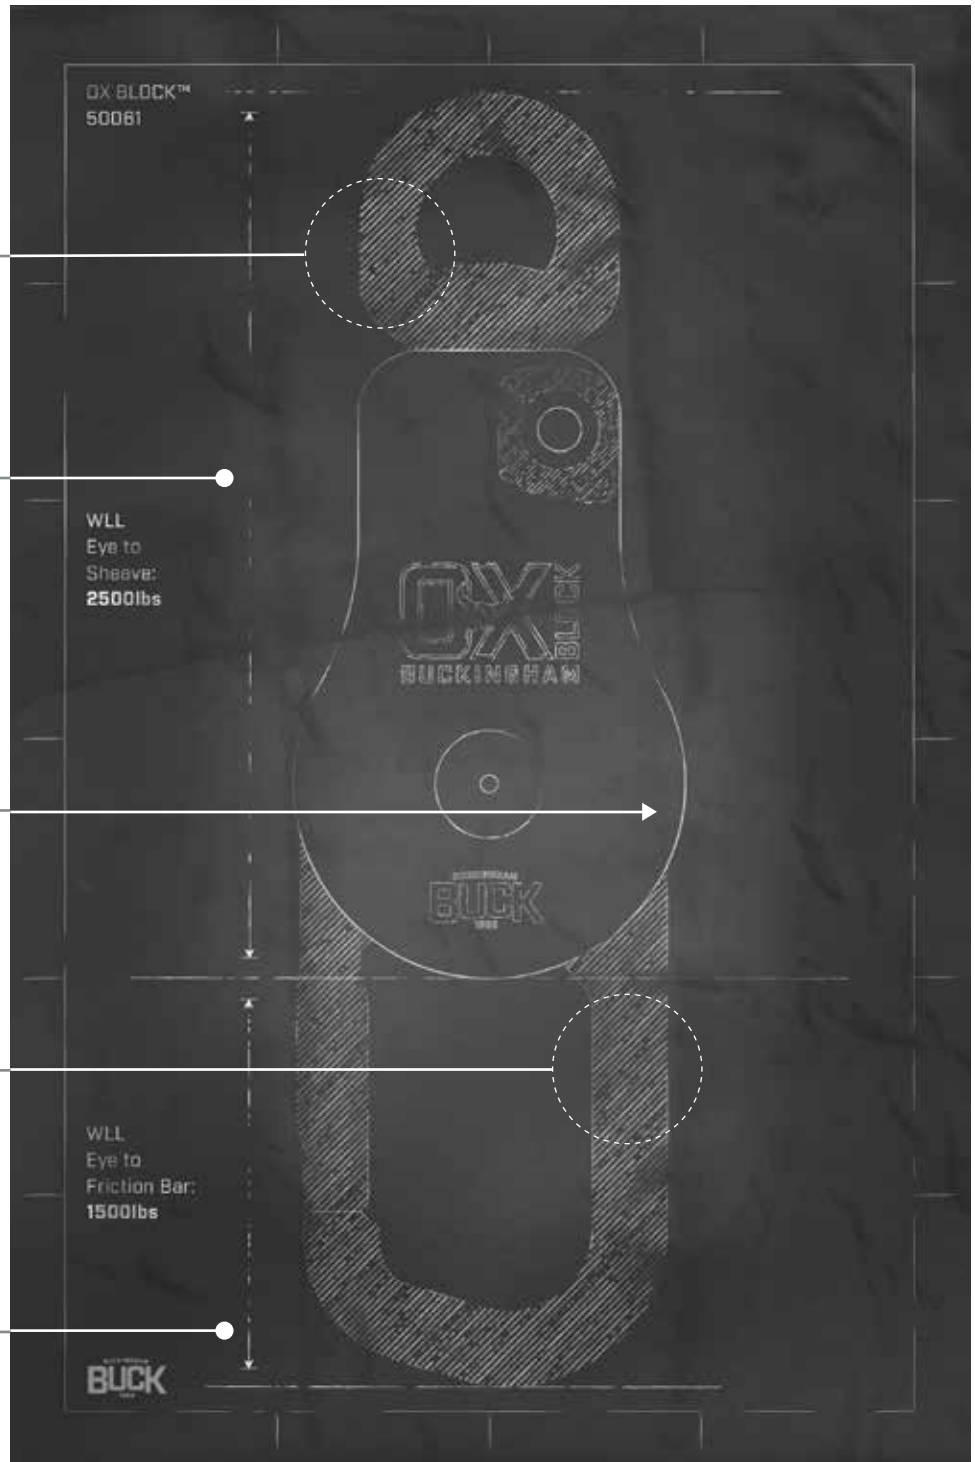

# EASE THE LOAD

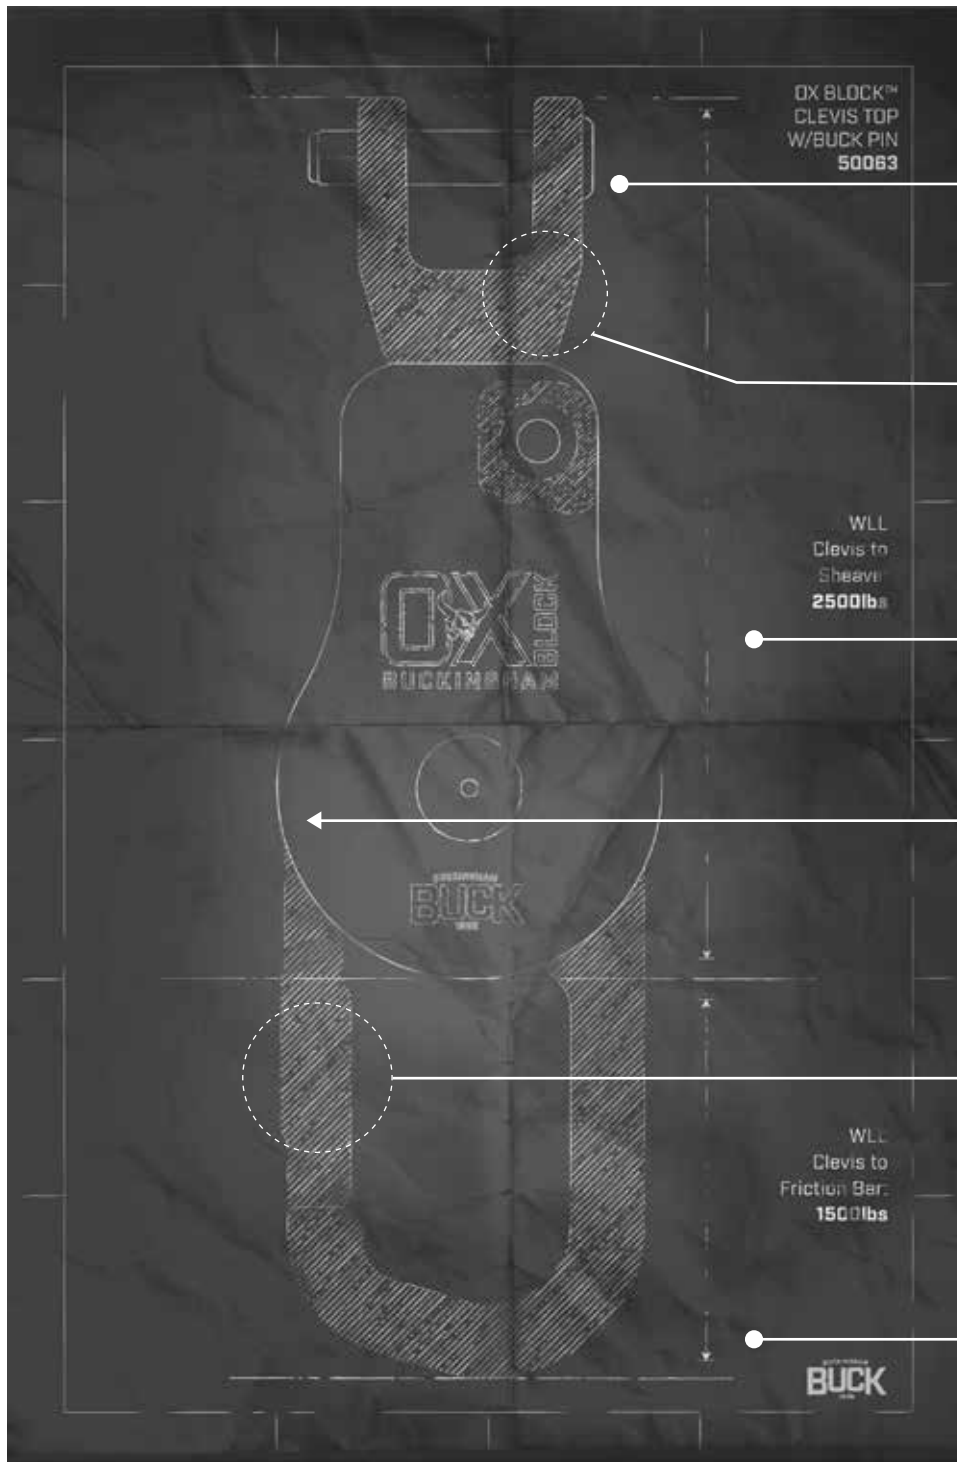

## BUCK PIN

ADD OR REMOVE ACCESSORIES  
MORE QUICKLY AND EASILY

## CLEVIS TOP

ALLOWS FOR EASY CHANGE  
OF ACCESSORIES

WLL Clevis to Sheave:  
2500lbs

## SWIVEL SIDE PLATE

## INTEGRATED FRICTION BAR

WLL Clevis to Friction Bar:  
1500lbs

---

# ADDITIONAL

## OX BLOCK™ CONFIGURATIONS

### OX BLOCK™ W/CLEVIS TOP & HOOK

50062C

This versatile design allows the user to customize the attachment options with authorized Buckingham accessories. The hook can also be attached directly to a suitable anchor point. Working load limit (hook to sheave): 2500lbs.



### OX BLOCK™ W/CLEVIS TOP & OX HORN™

50062D

The **OX BLOCK™** now features the new **OX HORN™** with a 2" wide gate opening designed to replace non-rated "meat hooks." Gate locks open or closed. Working load limit, **OX HORN™** to Sheave (gate closed): 2500lbs. Working load limit, **OX HORN™** to sheave (gate open): 1000lbs.





# OX HOOK™

## & OX HOOK SLIDE-R™

The patented OX HOOK™ can handle it all: light loads, heavy loads and even rescue!  
Perfect for use with the OX BLOCK™.

### WATCH THE VIDEO:

Watch the video at  
[BuckinghamMFG.com/  
videos](http://BuckinghamMFG.com/videos)

- Features a WLL of 2500lbs (gate closed) and 1000lbs (gate open)
- A 5000lb rating (when used for rescue) and a 3600lb rated gate, greatly reducing the time to get an injured victim to the ground (simply wrap, snap and cut)
- Gate can be locked in the open position and used like a traditional handline hook or can be locked closed to keep loads securely attached
- OX HOOK™ Handline Assembly includes a locking snap hook **1706** stitched on opposite end for added versatility
- See page 17 for OX HOOK™ handline assemblies

### OX HOOK™ 2406S



### CUSTOMER REVIEW:

"I never go anywhere  
without my Ox Block and  
Ox Horn."  
—Journeyman Linemen

### OX HOOK SLIDE-R™ KIT48

Allows the ground man to easily raise and lower loads while standing out away from the work area. Man rated pulley **RP110** (7000lbs) and triple action aluminum carabiner **5555S4** (6750lbs) can be used to perform a hurtman (skate) rescue from a pole or steel structure. Max weight when using OX HOOK SLIDE-R™ is 500lbs. See page 11 for working view.



NEW



# CONFIGURATIONS

## FOR THE OX BLOCK™


When configured with optional pulleys, the patented OX BLOCK™ can be used to create a 2:1, 4:1 or 6:1 mechanical advantage reducing the amount of force needed to lift heavy loads. The benefit of the pulleys is that the swivel side plate allows for quick and easy rope installation without removing the pulley from the connecting device.

### OX BLOCK™ Configurations


#### 1. COMMON CONFIGURATION






#### 2. HURTMAN RESCUE & LOWERING LOAD W/ FRICTION

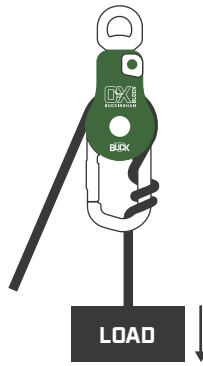

#### 3. SNUBBING LOAD

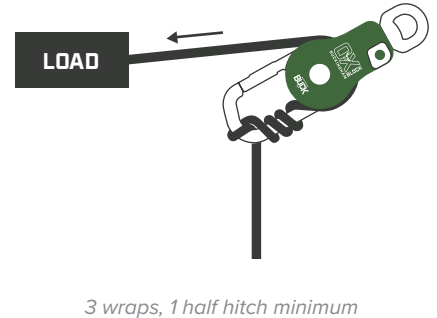

#### 4. RAISING LOAD

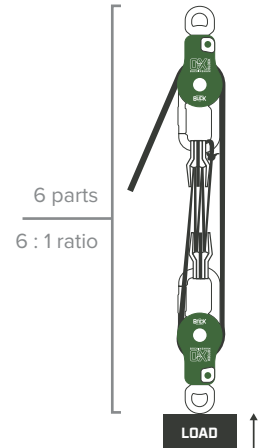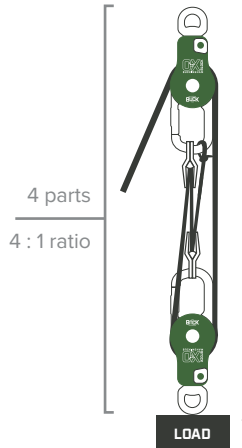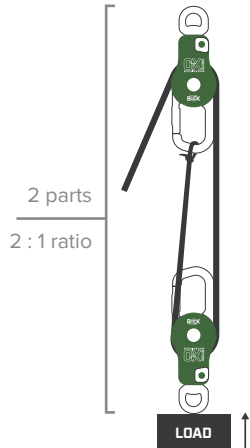

#### WATCH THE VIDEO:

Watch the video at  
[BuckinghamMFG.com/  
 videos](http://BuckinghamMFG.com/videos)



# THE OX BLOCK™ IN ACTION

RAISE IT / LOWER IT / SNUB IT / LOCK IT / SLIDE IT / HOOK IT / RESCUE IT


**RAISE IT**



**RAISE IT**




**LOWER IT**

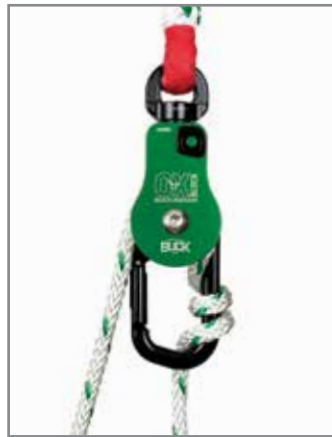

**SNUB IT**



**LOCK IT**

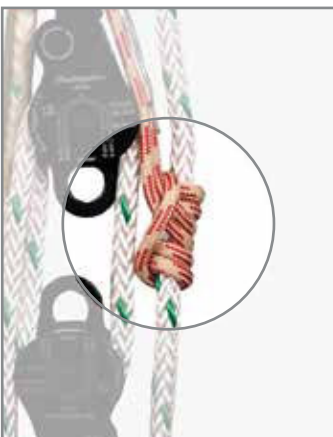

**SLIDE IT**



**HOOK IT**



**RESCUE IT**



# BUCK BLOCKS & ACCESSORIES



**Buck Rigger™  
Single Sheave  
5007R1**

Single sheave pulley with a swivel side plate and swivel eye. 1/2" rope capacity.

**WLL: 1800lbf**



**Buck Rigger™  
Double Sheave  
5007R2**

Double sheave pulley with a swivel side plates and swivel eye. 1/2" rope capacity.

**WLL: 1800lbf**



**Buck Side Swivel™  
Single Sheave  
50071B1**

Heavy duty aluminum pulley with a single side swivel plate and swivel eye. Side plates are ideal for use with progress capture Prusik. 5/8" rope capacity.

**WLL: 2500lbf**



**Buck Side Swivel™  
Double Sheave  
50071B2**

Heavy duty aluminum pulley with double side swivel plates and swivel eye. Side plates are ideal for use with progress capture Prusik. 5/8" rope capacity.

**WLL: 2500lbf**



**Clevis Side Swivel™  
Single Sheave  
50072B1**

Same features as the regular Buck Side Swivel™ with the added benefit of the clevis top for additional attachment options and easier change out of accessories.

**WLL: 2500lbf**



**Clevis Side Swivel™  
Double Sheave  
50072B2**

Same features as the Clevis Side Swivel™ single sheave in a double sheave design.

**WLL: 2500lbf**



**Steel Double Action  
Rigging Carabiner  
5005S5**

Steel double-action carabiner w/MBS rating of 12,000 lbs. (55kN) and WLL of 2,500 lbf. (11kN). Rated to meet ANSI Z359 standards & ANSI A10-48.



**Buck Pin  
223892R**

A SLIC Pin specifically customized to fit the OX clevis top. The Buck Pin allows the user to add or remove accessories more quickly and easily than the shoulder bolt does.



**30" 8MM Progress  
Capture Prusik  
P9J8V-10-30S**

A 30" eye to eye Prusik made of 8mm Dyneema rope.



**OX TAIL™  
39078TAG1-4**

4' x 5/8" adjustable sling.  
**39078TAG1-7**  
7' x 5/8" adjustable sling.

**WLL:**

**Straight 3200 lbf.  
Choker 2560 lbf.  
Basket 6400 lbf.**



**BuckLink™ Sling  
3903S-6**

The BuckLink™ is made of lightweight Spectra material. Each loop is rated to 5,000 lbs. With 16 loops, users can adjust the sling to form a rated anchor of any size.



**OX HORN  
31291B**

2" gate opening, Replaces a non-rated "meat hook". WLL of 2500 lbs. w/gate closed. 1000 lbs. WLL w/gate open. For use on the Ox Block™ w/ clevis top.



**OX HOOK™  
2406S**

Features a 3600lbf rated locking gate making rescue situations more efficient. WLL of 2500lbs with gate closed. 1000 lbs. WLL with gate open.



**Rigging Hook  
223814R**

A hook latch meant strictly for attachment purposes, not to carry a load. Has a working load limit of 1 ton.



# OX BLOCK™ KITS



## Ultimate OX™ Kit w/ BuckRigger™ 50061K31

A complete rigging system that puts numerous rigging options at the user's fingertips. The user can create a 4-to-1 mechanical advantage on up to a 50' working height. Similarly, the user can create a 5-to-1 mechanical advantage on up to a 35' working height.

Kit Includes:

- Model **50061A-4** - OX BLOCK™ Swivel Eye & Carabiner w/4' Sling (Qty: 1)
- Model **50061** - OX BLOCK™ (Qty: 1)
- Model **50071B1** - Buck Side Swivel Single Sheath (Qty: 1)
- Model **50071B2** - Buck Side Swivel Double Sheath (Qty: 2)
- Model **5007R1** - Single Sheave BuckRigger™ (Qty: 1)
- Model **4374** - Rope Bag (Qty: 1)
- Model **39SAM27Q2-250** -Rope 250' (Qty: 1) OR Model **39SAM27Q2-400** - Rope 400' (Qty: 1)
- Model **5005S5** - Steel Double Action Carabiner
- Model **P9J8V-M-+34** - Prusik Loop with Aluminum Ring (Qty: 2)
- Model **P9C8V-10-16S** - 8mm Warpspeed 16" Endless Loop (Qty: 1)
- Model **3903S-6** - BuckLink™ Sling (Qty: 1)



## Basic OX Kit 50062K28

A cost-effective alternative to the Ultimate OX Kit, giving you everything you need to work, lower and lift up to 40'. The BOK gives you the option of a 2:1, 3:1, & 4:1 pulley system.

Kit Includes:

- Model **50062K14-4/80** - OX BLOCK™ Clevis Top/80' OX HOOK™ Handline Assembly (Qty: 1)
- Model **39SAM27Q2-200** - 200' Rope (Qty: 1)
- Model **5007R1** - Single Sheave BuckRigger™ (Qty: 1)
- Model **5007R2** - Double Sheave BuckRigger™ (Qty: 1)
- Model **P9C8V-10-16S** - 8mm Warpspeed 16" Endless Loop - Progress Capture (Qty: 1)
- Model **5005S5** - Steel Double Action Carabiner (Qty: 1)
- Model **45400G10-9** - 9" Mesh Equipment Bag (Qty: 1)
- Model **4374** - Large RopePro™ Deluxe Bag (Qty: 1)



## OX Block™ Transmission Kit 50062K6-250

An OX Block™ handline assembly that was designed to be specifically used on a transmission pole measuring up to 125' long. The OX Block™ Transmission Kit is complete rigging system that puts numerous rigging options at the user's fingertips.

Kit Includes:

- Model **50061** - OX Block™ (Qty: 1)
- Model **5007R2** - Double Sheave BuckRigger™ (Qty: 2)
- Model **5005S5** - Steel Double Action Rigging Carabiner (Qty: 2)
- Model **4374** - RopePro™ Deluxe Bag (Qty: 1)
- 250' handline assembly
- OX Block™ w/ adjustable 4' sling



# OX BLOCK™ KITS



## BuckLink™ Sling Kit

### \*KIT1

The BuckLink™ Sling Kit features 4 Slings, 5 Carabiners and 1 Small Storage Bag. With the 4 Slings, they can make up a 4-Legged Sling and use the Carabiners however they want. Whether it's using the BuckLink™ Sling to rig an OX BLOCK™ or pulling wire and holding it up on a cross arm, this product is the ultimate daisy chain style anchor sling that should be found on every truck across America due to its endless uses. Throw in our Rigging Carabiner, ideal for use with all OX BLOCK™ products and you've got yourself a rigging kit!

Kit Includes:

- Model **45400G10-9** - 9" Mesh Equipment Bag (Qty: 1)
- Model **3903SQ-6** - BuckLink™ Sling (Qty: 4)
- Model **5005S5** - Rigging Carabiner (Qty: 5)



## Buck Auxiliary Pulley Kit

### KIT86

The Buck Auxiliary Pulley Kit features heavy duty aluminum double & single sheave side swivels with 5/8" diameter rope capacity with a 2500 lbf working load limit. Ideal for building mechanical advantage with the OX BLOCK™.

Kit Includes:

- Model **45400G10-9** – 9" Mesh Equipment Bag (Qty: 1)
- Model **50071B1** – Single Sheave Side Swivel™ (Qty: 2)
- Model **50071B2** – Double Sheave Side Swivel™ (Qty: 2)



## BuckRigger™ Kit

### KIT97

The BuckRigger™ Kit features two single sheaves and two double sheaves BuckRigger™ all packed into a 9" mesh bag for transport and storage purposes. Both the single and double sheave feature a 1/2" rope capacity, a WLL of 2,000 lbf. and have an MBS of 8,000 lbf.

Kit Includes:

- Model **50071B1** – Single Sheave BuckRigger™ (Qty: 2)
- Model **50071B2** – Double Sheave BuckRigger™ (Qty: 2)
- Model **45400G10-9** – 9" Mesh Equipment Bag (Qty: 1)



**OX BLOCK™  
W/BECKIES**

The OX BLOCK™ is available with extra 4' or 7' (5/8" diameter) adjustable sling designed to be connected back to a non-locking hook or triple action steel carabiner. See page 12 for sling information and ratings.

**OX BLOCK™ w/Clevis Top**

- 50062AC-4**  
Hook and 4' adjustable sling.
- 50062AC-7**  
Hook and 7' adjustable sling.



**OX BLOCK™ w/Swivel Eye**

- 50061A-4**  
4' adjustable sling and triple action steel carabiner (5005S5).
- 50061A-7**  
7' adjustable sling and triple action steel carabiner (5005S5).



**OX BLOCK™  
HANDLINE  
ASSEMBLIES**

*2406 handline hook not for human support.*



MODEL NO.	ADJUSTABLE SLING	CARABINER (5005S5)	HANDLINE ASSEMBLY LENGTH
50061A-4/80	4'	X	80'
50061A-4/100	4'	X	100'



MODEL NO.	ADJUSTABLE SLING	CLEVIS TOP & HOOK	HANDLINE ASSEMBLY LENGTH
50062AC-4/80	4'	X	80'
50062AC-4/100	4'	X	100'

**OX HOOK™ Handline Assembly**

- 2406S-80**  
80' handline w/OX HOOK™ and 1706 locking snap hook.
- 2406S-100**  
100' handline w/OX HOOK™ and 1706 locking snap hook.



MODEL NO.	ADJUSTABLE SLING	CARABINER (5005S5)	HANDLINE ASSEMBLY LENGTH
50061K15-4/80	4'	X	80'
50061K15-4/100	4'	X	100'
50061K15-7/100	7'	X	100'



MODEL NO.	ADJUSTABLE SLING	CLEVIS TOP & HOOK	HANDLINE ASSEMBLY LENGTH
50062K14-4/80	4'	X	80'
50062K14-4/100	4'	X	100'
50062K14-7/80	7'	X	80'

# FOR OUR COMPLETE PRODUCT LINE


VISIT [BUCKINGHAMMFG.COM](http://BUCKINGHAMMFG.COM)




## FOR MORE CATALOGS




**LINEMEN  
MINI CATALOG**



**ARBORIST  
MINI CATALOG**




**TOWER  
MINI CATALOG**




**CABLE/TELECOM  
MINI CATALOG**



**SUBSTATION  
MINI CATALOG**



**TELECOM + WIRELESS  
TOWER MINI CATALOG**



**FALL PROTECTION  
MINI CATALOG**



**CANVAS  
MINI CATALOG**



# OFFICIAL TRAINING PARTNERS

Buckingham Manufacturing is proud to work with the following training partners to provide training on products and systems that we offer.



## SAFETY ONE TRAINING INC.

Safety One Training was founded with the vision to bring safety and rescue training services to snowcat operators. Since then, the company has grown, and the training programs have expanded into other areas such as utility, telecommunications, governments and military industries, as well as independent contractors. Safety One Training has become a leader in fall protection.

[www.safetyoneinc.com](http://www.safetyoneinc.com)



## ARBORMASTER

ArborMaster Training has been the leader and premier provider of private in-house hands-on customized training programs and regional open-enrollment courses through their innovative Safety, Skill and Productivity education and training for people and organizations who work with, in, and around trees.

[www.arbormaster.com](http://www.arbormaster.com)



## NATS

NATS mission is to empower people to live and work safely, creating a positive impact, and to be the best version of themselves by inspiring a culture of safety through leadership, sustainability, and integrity. They offer training and educational programs, share knowledge, resources, and tools to increase safety and efficiency in the workplace.

[www.northamericantrainingsolutions.com](http://www.northamericantrainingsolutions.com)



## TOWER SAFETY

Tower Safety and Rescue provide courses with instructors who provide extensive knowledge in rigging, climbing, rescue, and installation. They have SPRAT Level 3 trainers and offer the best of all the rope access industries. Tower Safety is a Cell Tower, SPRAT, and Confine Space and Rescue Safety Training Company providing excellent training in safety and rescue learn, lead and live.

[www.towersafety.com](http://www.towersafety.com)

BUCKINGHAM  
**BUCK**  
1896